

# ZXL<sup>MB</sup> WoodBinder<sup>®</sup>

## Features and Benefits

### MB™ New Micro-Bit<sup>™</sup> Engineering

- Designed to fasten steel roofing to wood purlins used in post-frame construction, plywood or OSB used in residential construction.
- 5/16" cupped HWH with a molded ZAMAC 3 Zinc-Aluminum alloy provides lifetime protection against red rust on the head & washer. You may obtain a free copy of the written warranty upon request.
- ZXL™ is an excellent choice for GALVALUME & other long-life metal roof panels.
- Threads transition from fine to coarse to generate superior holding strength in various wood substrates.
- Micro-Bit™ point reduces metal shavings that can embed themselves in the rubber washer.

ALL UNPAINTED WOODBINDER MB FASTENERS COME STANDARD WITH DURASEAL® PLUS ENHANCED CORROSION RESISTANCE COATING

FOR PROPER INSTALLATION, THE USE OF IMPACT DRIVERS ARE NOT RECOMMENDED FOR POWDER COATED OR ANY WET PAINTED FASTENER.

PULL OUT & PULL OVER VALUES ARE DETERMINED IN THE ST FASTENING SYSTEMS ENGINEERING LABORATORY USING STEEL PANELS/FRAMING & WOOD DENSITIES WHOSE STRUCTURAL PROPERTIES ARE FOUND IN PRESENT DAY PRODUCTS.

THE MB MICRO-BIT POINT MAY GENERATE SMALL METAL SHAVINGS UPON INSTALLATION. IT IS RECOMMENDED TO CLEAN/SWEEP THE METAL PANELS AFTER INSTALLATION TO PREVENT PREMATURE RUST SPECKS.

SIZE	CARTON QTY.	WEIGHT/M
10 x 1"	3000	12.7
10 x 1 1/2"	2500	14.7
10 x 2"	2000	17.0
10 x 2 1/2"	1500	19.2
10 x 3"	1000	21.0
12 x 3/4" Stitch	2500	9.0

### PULL OUT STRENGTH LBS. ULT.

SUBSTRATE	PENETRATION	10-16/8 VALUE	STITCH VALUE
3/4" PLY	FULL	636	N/A
5/8" PLY	FULL	441	N/A
5/8" PLY	1/2"	N/A	297
1/2" PLY	FULL	368	N/A
1/2" PLY	1/2"	N/A	329
7/16" OSB	FULL	210	N/A
7/16" OSB	1/2"	N/A	217
2 X Y. PINE	1"	713	N/A
2 X Y. PINE	1/2"	N/A	495
2 X Y. PINE	1 1/2"	1526	N/A
2 X SPF	1"	466	N/A
2 X SPF	1/2"	N/A	162
2 X SPF	1 1/2"	1216	N/A



\* Y.PINE (Yellow Pine) \* SPF (Spruce Pine Fir)

### PULL OVER STRENGTH LBS. ULT.

SUBSTRATE	GAUGE	THICKNESS	10-16/8 VALUE	STITCH VALUE
AZ55 Galvalume	29	.014	658	658
AZ55 Galvalume	26	.018	927	927
AZ55 Galvalume	24	.024	1035	1035
AZ55 Galvalume	22	.030	1386	1386

### NOTES

1. \*\*CHWH-Cupped Hex Washer Head.
  2. \*\*\* Tabulated value is the force at which the ZXL head breaks from the carbon steel body.
  3. All strength values shown are ultimate values, express in LBS. Apply an appropriate safety factor to obtain design limits.
- 6357 Reynolds Road Tyler, Texas 75708 | P.O. Box 4515, Tyler, Texas 75712 | 800-352-4864 | 800-352-3940 Fax  
9950 Princeton Glendale Rd. Cincinnati, OH 45246 | 800-944-8920 | 800-352-3940 Fax  
Copyright 2017 © ST Fastening Systems, Division of The Hillman Group. All rights reserved.

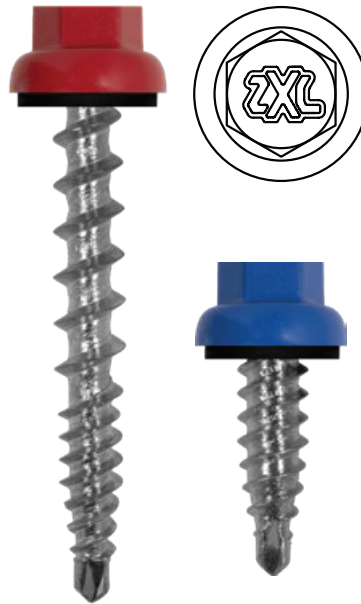

The Zinc-Aluminum alloy HWH prevents red rust from ever starting. ST Fastening Systems spring retainer sockets are designed to allow for the added thickness of the powder coat and are recommended.

The combination of the Micro-Bit point & transition thread from fine to coarse generates superior drill speed in metal & holding strength in wood substrates.




**No Red-Rust Guaranteed!**



HEAD STYLE	5/16" CHWH**
DRILL POINT	MICRO-BIT™
MAJOR DIAMETER	.205/.191 .215/.209 STITCH
MINOR DIAMETER	.121/.116 .160/.153 STITCH
WASHER/HEAD DIAMETER	.500" .500" STITCH
HEAD ACROSS FLATS	NOM. .312" NOM. .312" STITCH
ULT. TENSILE STRENGTH	1575** LBS. 1575** LBS.* STITCH
MIN. TORSIONAL STRENGTH	60 IN.-LBS. 88 IN.-LBS. STITCH
NOM. SHEAR STRENGTH	1547 LBS. 1962 LBS. STITCH

## Applications

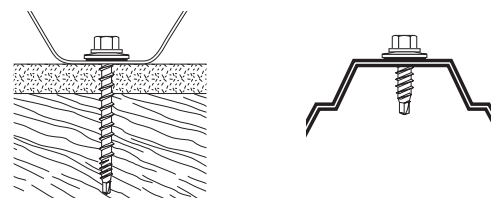

ARCHITECTURAL  
SERIES

A Division of The Hillman Group [WWW.STFASTENINGSYSTEMS.COM](http://WWW.STFASTENINGSYSTEMS.COM)