

# (208) 745-1500


# **Specialty Color Guide**


Up to 35 Year Limited Paint Warranty Available\*

Fluropon® PVDF Kynar 500® or Hylar 5000® (fluoropolymer - polyvinylidene fluoride) Standard Gauges 26ga, 24ga & 22ga

Optional Steel Gauges: 30ga, 29ga, 28ga, 26ga, 24ga, 22ga, 20ga, 18ga, 16ga, 14ga, 12ga, 10ga and up. Aluminum 0.025 up to 0.250 | Natural Copper 12oz up to 96oz | Natural Zinc 0.70mm up to 1.50mm

### SPECIALTY COL

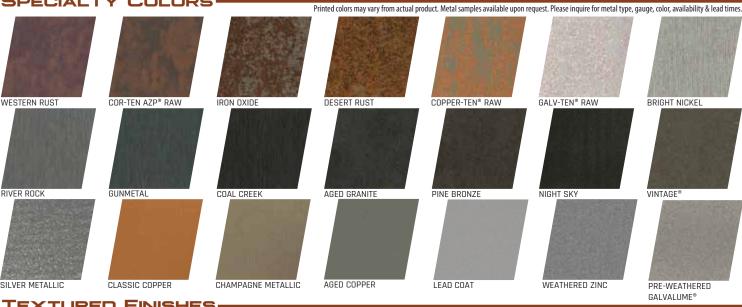

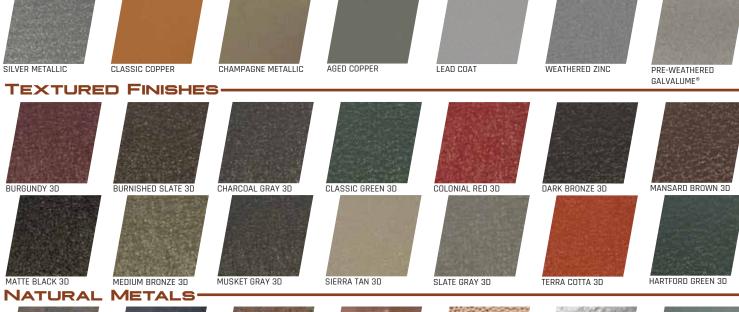





HOT ROLLED 16ga-8 Weathering Steel



A606-4 (CORTEN) 22ga-34"




NATURAL COPPER 120z-960z












BONDERIZED







GALVANIZED 29aa-10aa







ANODIZED ALUMINUM Many Finishes Available



304 STAINLESS STEEL



## **Many More**

Colors, Custom Colors & Specialty Finishes Available

Smooth & Stucco Embossed Available.
 For ENERGY STAR® Solar Reflectance data please inquire for more information.






























### METAL ROOFING & SIDING

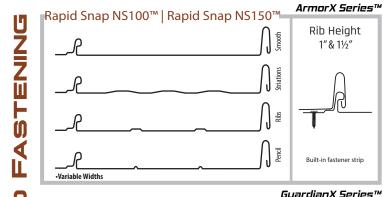










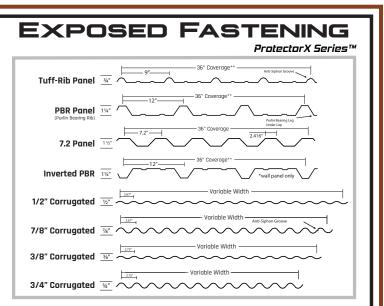

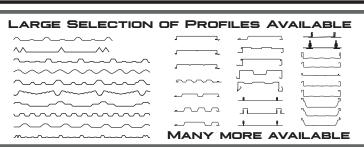



Concealed Fastener Standing Seam Profiles available in many gauges, height, width, & length variations with an optional thermally-applied butyl Sure Seam Sediant\*\* available for low slope applications. Weathertight Warranties Available, Please inquire for more information.



WE OFFER MANY COLORS & PROFILES NOT INCLUDED ON THIS CHART

· Many other panel profiles are available. Please talk to representive for details.

· Standard & Custom trim available for all profiles and for profiles not listed.

· Custom trim options available for a variety of different applications.

· Large Inventory of Coil, Flat Sheet, Fasteners, Sealants & Accessories.

STANDARD & CUSTOM BENDING/FOLDING

•Not all colors, gauges or panels are in stock. Inquire for availability and lead times.

•Please inquire for metal type, gauge, color, availability and lead times.

\*\*Actual coverage may vary slightly due to the characteristics of the steel.

‡Weathertight Warranties Available. Inquire for more information.
•Protective film must be removed immediately after installation.

•Please see product specification sheet for more details.

Please see product specification sheet for more deta Clips shown are for representation only.

•Oil Canning not a cause for rejection.

П

4

Ž

Toll Free: (866) 724-7171 Office: (208) 745-1500

Email: sales@briggssteel.com Fax: (208) 745-0675

f 🎐 🤊 🖸 🕏 G+ in 🔼 🗗 👁 t

www.BriggsSteel.com

4056 E 300 N Rigby, Idaho 83442

