




# Grade 50 Standard 26ga Color Guide

(208) 745-1500

**Ceranamel XT-40S™ High Performance SMP**  
(silicone modified polyester)

## STANDARD COLORS

Printed colors may vary from actual product. Metal samples available upon request. Please inquire for metal type, gauge, color, availability & lead times.



BONE WHITE



ALMOND



ANTIQUE IVORY



ASH GRAY



SIERRA TAN



SLATE GRAY



MUSKET GRAY



PEBBLE CLAY



CHARCOAL GRAY



DEEP BLACK



MATTE BLACK



MANSARD BROWN



MEDIUM BRONZE



DARK BRONZE



BURNISHED SLATE



BURGUNDY



COLONIAL RED



TERRA COTTA



HARTFORD GREEN



CLASSIC GREEN



SLATE BLUE



COPPER PENNY\*

Many More Colors & Custom Colors Available



## NON-PAINTED



GALVALUME® PLUS (acrylic coated)



GALVANIZED

\*For ENERGY STAR® Solar Reflectance data, please see panel profile brochure(s).



**Dura Coat**  
PRODUCTS  
An Axalta Coating Systems Company

**Ceranamel XT-40S™**



























Up to a  
**30**  
YEAR  
Paint Warranty

-Steel Substrate Grade D (yield strength of 50,000 psi) & Grade E (yield strength of 80,000 psi).  
-Substrate Coatings - Galvalume® AZ50, AZ55, AZ60, AZ70 & Galvanized G40, G60, G90, G100.  
-Due to product advancements, changes and other factors, we reserve the right to modify or delete the information herein without prior notice.

-Dura Coat is a registered trademark of Dura Coat Products, Inc.  
-Ceranamel XT-40S is a trademark of Dura Coat Products, Inc.  
-Galvalume® is a registered trademark of BIEC International, Inc.  
-Protective film must be removed immediately after installation.

-ENERGY STAR® and the ENERGY STAR® mark are registered trademarks owned by the U.S. Environmental Protection Agency.  
\*Metallics are a premium cost and are batch sensitive, therefore variations are very common and expected.

-For ENERGY STAR® Solar Reflectance data, please inquire for more information.  
-Not all products listed offer 30 year paint warranty and warranties vary.  
-Not all products qualify for ENERGY STAR® rating.  
-Oil Canning is not a cause for rejection. See oil canning disclaimer.

PANEL SELECTION		Almond	Antique Ivory	Ash Gray	Bone White	Burgundy	Burnished Slate	Charcoal Gray	Classic Green	Colonial Red	Copper Penny	Dark Bronze	Deep Blue®	Galvalume®	Galvalume	Hartford Green	Mansard Brown	Matte Black	Medium Bronze	Musket Gray	Pebble Clay	Sierra Tan	Slate Blue	Slate Gray	Terra Cotta
Many more metal types, gauges, colors & widths not listed below are available.																									
Tuff Rib PlusX™ Panel		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
1/2" Corrugated Maxx™ Wall Panel		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
1/2" Corrugated Maxx™ Roof Panel		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
7/8" Corrugated Maxx™ Wall Panel		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
7/8" Corrugated Maxx™ Roof Panel		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
PBR PlusX™ Panel		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
Inverted R Panel SLW™		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
Rapid Snap NS100™ 11.75" Coverage		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
Rapid Snap NS100™ 15.75" Coverage		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
Rapid Snap NS100™ 19.75" Coverage		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
Sure Snap SL100™ 12.875" Coverage		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
Sure Snap SL100™ 16.875" Coverage		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
Sure Snap SL100™ 20.875" Coverage		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
Sure Lock ML100™ 12.625" Coverage		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
Sure Lock ML100™ 16.625" Coverage		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
Sure Lock ML100™ 20.625" Coverage		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
Sure Lock ML150™ 11.75" Coverage		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
Sure Lock ML150™ 15.75" Coverage		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
Sure Lock ML150™ 19.75" Coverage		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
Sure Lock Seamless Batten 11", 15" Coverage		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
Sure Snap Seamless Batten 11", 15", 19" Coverage		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
FlushX™ Panel 8", 12", 16", 20"		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
Reveal FlushX™ 8", 12", 16", 20"		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
Slat Wall InfinityX™ 7", 8", 10", 12"		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
Sure Grip Board & Batten™ 4", 6", 8"		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
5" & 6 K-Style InfinityX™		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•

• Standard Colors Available.

• Standard Colors available at this width at an increased cost, due to drop waste.

• Available at this width at an increased cost, due to drop waste.

• Components available with alternate pricing and longer lead times.


CeramelXT-40S™

Dura Coat  
PRODUCTS  
An Axalta Coating Systems Company

#### WE OFFER MANY COLORS & PROFILES NOT INCLUDED ON THIS CHART



- Many other panel profiles are available. Please talk to representative for details.
- Standard & Custom trim available for all profiles and for profiles not listed.
- Custom trim options available for a variety of different applications.
- Large Inventory of Coil, Flat Sheet, Fasteners, Sealants & Accessories.

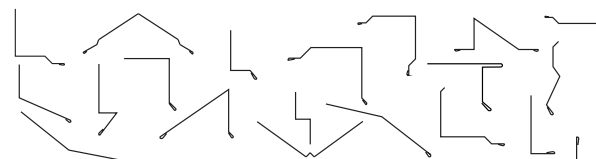

STANDARD & CUSTOM BENDING/FOLDING

\*\*Actual coverage may vary slightly due to the characteristics of the steel.

• Please inquire for metal type, gauge, color, availability and lead times.

• Protective film must be removed immediately after installation.

• Please see product specification sheet for more details.

• Oil Canning is not a cause for rejection.

• Profiles are not to scale.

Toll-Free: (866) 724-7171

Office: (208) 745-1500

Email: sales@briggssteel.com

Fax: (208) 745-0675

www.BriggsSteel.com

4056 E 300 N

Rigby, Idaho 83442



Copyright © 2020 by Briggs Steel. All rights reserved. Rev 02/20.

Due to product advancements, changes and other factors, we reserve the right to modify or delete the information herein without prior notice.

