

CurvedX Series / Curved Panels

Product Highlights

Briggs Steel offers many profiles that are designed to be curved. With our large selection of colors and materials available we are certain you will find the look you are going for. Concave or Convex Radius; Modern or Rustic these panels will meet your design outcome. We also offer Curved Trim to match up with your project needs. Please see Data sheet for more information regarding the panel you are interested in.

Sure Lock ML100™ Variable Width Sure Lock ML150™ Variable Width-Sure Lock ML200 HD™ Variable Width Flex Lock Panel Flex Lock Panel

Materials Available

26ga, 24ga, 22ga Steel

0.032" Aluminum

16oz, 20oz Natural Copper

0.7mm, 0.8mm, Natural Zinc

WeatherXL™SMP by Sherwin-Williams® Fluropon® by Sherwin-Williams® PVDF (Kynar 500®)

Textured / Crinkle (Rawhide)

Vintage® Western Rust Cor-Ten AZP® Raw Copper-Ten® Raw Galv-Ten® Raw

Galvalume® (Acrylic Coating)

Galvanized Electro-Galvanized Galvannealed


Bonderized Weathering Steel ReziBond® Weathering Steel Cold Rolled Weathering Steel A606-4 (Corten) Weathering Steel


Hammered Copper Stainless Steel Perforated

(See Color Guide(s) for Many More Options)





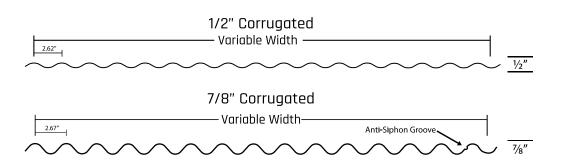



Product Specifications

Coverage

Thickness:

Substrate Install:

Wall, Soffit, Fascia, Ceiling, Interior Applications:

Custom Widths & Lengths

(Variable Types & Sizes)

Coatings:

(Variable Types & Sizes)

Fluropon® by Sherwin-Williams® PVDF (Kynar 500® or Hylar 5000®) Fluropon® by Sherwin-Williams® PVDF 3 Coat (Kynar 500® or Hylar 5000®)

Recommended Protective Film Available Upon Request

AZ55 Galvalume® with Acrylic Coating

Fastening System: Exposed & Concealed Fastening

Solid

Field Conditions:

Oil Canning is inherent in all light gauge metal products & is not a cause for

rejection. Visit www.briggssteel.com/oilcanning for more information.

24ga High Quality Grade D (yield strength of 50,000 psi)

Accessories:

More Details:

Custom Trim, Custom Radius Trim, Fasteners, Sealant, Closures, Venting, Pipe Flashings, Underlayment, Snow Retention, Polycarbonate Panels, Many

For more information about this profile, please visit www.BriggsSteel.com

Phone: (208) 745-1500

Note: For standard color selection, consult the current Briggs Steel Color Selection Guides. Custom colors are available upon request. **Actual coverage may vary slightly due to the characteristics of the steel.

(optional) 26ga, 22ga (Please inquire for more available thicknesses)