




# Technical Information

## EZ Vent-N-Closure Non-Vented

### Product Highlights

EZ Vent-N-Closure is a great option for a variety of Watertight Type Applications; designed to fit most any panel with ease of install, incredibly durable and watertight this product is second to none.

\*Also available in a vented version for a variety of application methods. Please see vented data sheet for details.

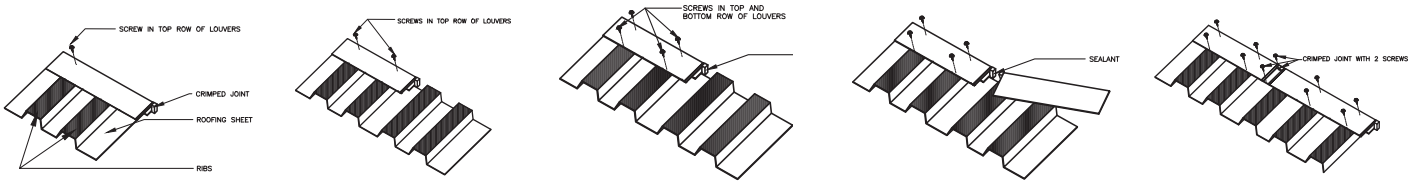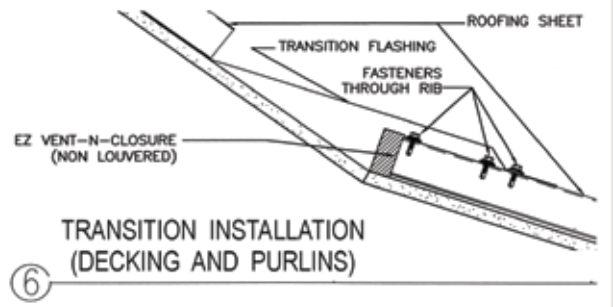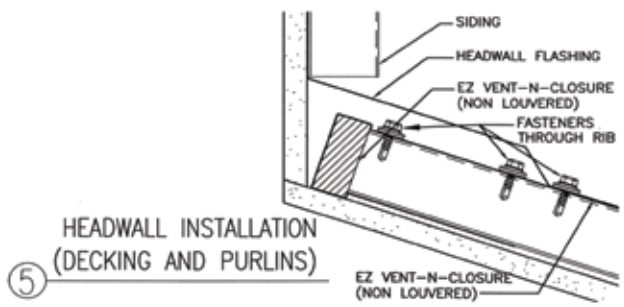


### Product Specifications

<b>Applications:</b>	Headwall, Transition, Ridge, Roof Hip (New or Retrofit Construction)
<b>Length:</b>	60" in length with a connecting joint
<b>Height:</b>	0.75", 0.875", 1.00", 1.25", 1.50", 1.75", 2.00" (Custom Sizes Available)
<b>Minimum Slope:</b>	¼:12 Pitch or greater
<b>Fastener:</b>	Concealed under cover trim
<b>Substrate Install:</b>	Solid / Open Purlin
<b>Materials:</b>	26ga High Quality Grade E (yield strength of 80,000 psi) with built-in foam closure
<b>Venting:</b>	Non-Vented (vented version available)
<b>Warranty:</b>	Limited Lifetime Watertight Warranty
<b>Testing:</b>	Tested in Accordance with TAS-100A (110 MPH Wind Driven Rain Test)

\*Please inquire for full installation instructions.

#### Transition Trim



#### Headwall Trim

