






EZ Vent-N-Closure

Vented

Product Highlights

EZ Vent-N-Closure is a great option for a variety of Venting & Watertight Applications; designed to fit most any panel with ease of install, incredibly durable and watertight this product is second to none.


*Also available in a non-vented version for a variety of application methods. Please see non-vented data sheet for details.

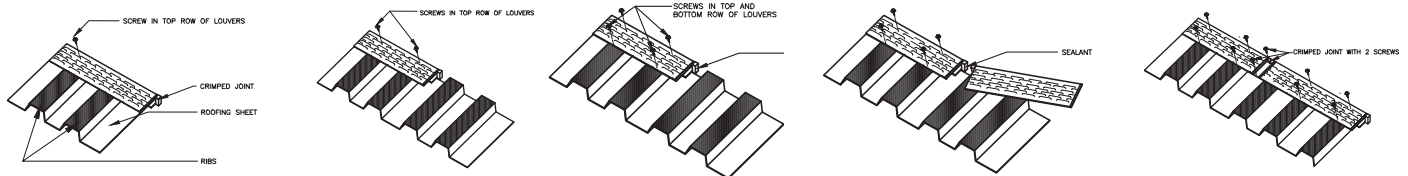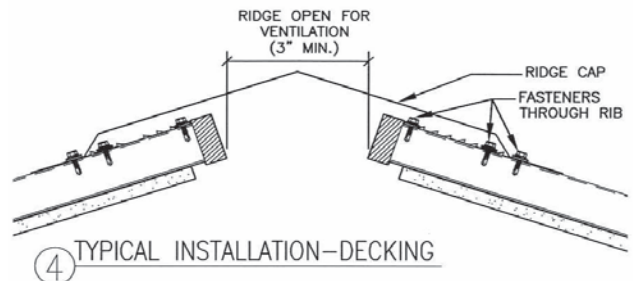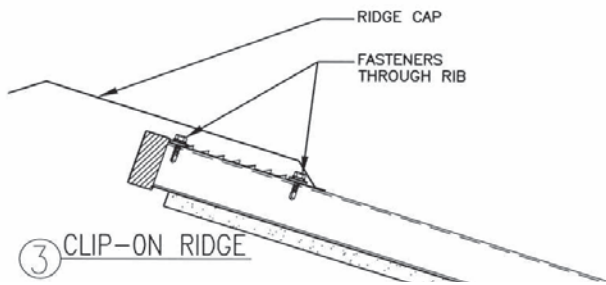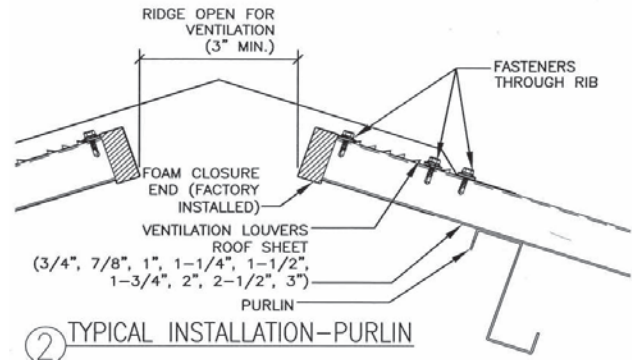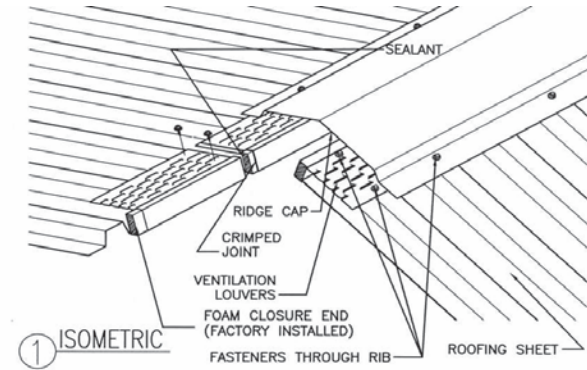

Product Specifications

- Applications:** Ridge, Roof Hip, Headwall, Transition (New or Retrofit Construction)
- Length:** 60" in length with a connecting joint
- Height:** 0.75", 0.875", 1.00", 1.25", 1.50", 1.75", 2.00" (Custom Sizes Available)
- Minimum Slope:** 1/4:12 Pitch or greater
- Fastener:** Concealed under cover trim
- Substrate Install:** Solid / Open Purlin
- Materials:** 26ga High Quality Grade E (yield strength of 80,000 psi) with built-in Foam Closure
- Venting:** 12 inches of net free area per linear foot (non-vented available)
- Warranty:** Limited Lifetime Watertight Warranty
- Testing:** Tested in Accordance with TAS-100A (110 MPH Wind Driven Rain Test)

Ridge / Hip Trim

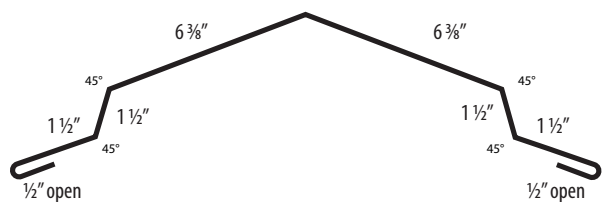

*Please inquire for full installation instructions.

*optional perforated z-metal for heavy snow load applications.

