

Concealed Fastening System


Technical Sheet



FacadeX Series / Triple Four Soffit

Product Highlights

Triple Four Soffit is one of the most commonly used soffit systems for the residential market. It's clean lines and affordability have made it a go to for the mass market. Available in many color options.

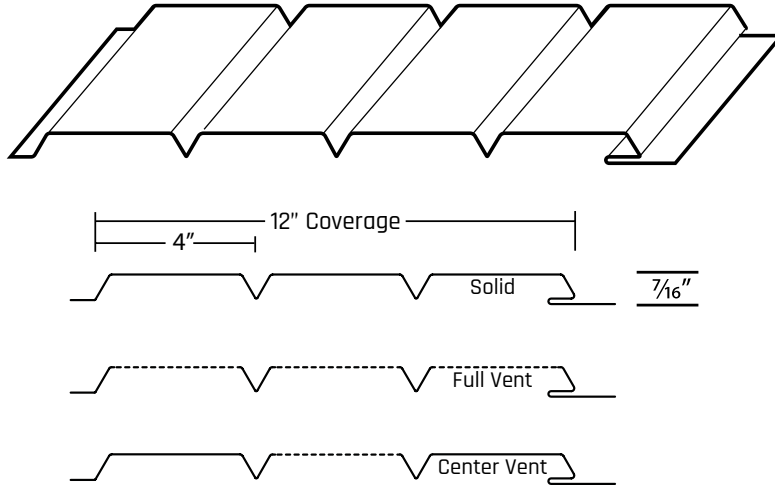

Materials Available

0.013", 0.016", 0.019", 0.032" Aluminum

29ga, 28ga, 26ga, 24ga, 22ga

16oz, 20oz, 24oz Natural Copper

Alumalure® 2000 by Alcoa® (double coat)
WeatherXL™ SMP by Sherwin-Williams®
Fluropon® by Sherwin-Williams® PVDF (Kynar 500®)

Textured / Crinkle (Rawhide)
Vintage®

Western Rust
Cor-Ten AZP® Raw
Copper-Ten® Raw
Gal-Ten® Raw
Galvalume® (Acrylic Coating)
Galvanized
Electro-Galvanized
Galvannealed
Bonderized Weathering Steel
ReziBond® Weathering Steel
Cold Rolled Weathering Steel
A606-4 (Corten) Weathering Steel
Hammered Copper
Natural Zinc
(See Color Guide(s) for Many More Options)



Product Specifications

Protective Film Available Upon Request

Applications: Wall, Soffit, Fascia, Ceiling, Interior

Coverage: 12" Coverage

Fastening System: Concealed Fastening

Substrate Install: Solid/Open Purlin System

Thickness: 0.019" (Please inquire for more available thicknesses)

Substrate: Aluminum

Ventilations: 4.4 inches of net free area per running foot (center venting)
13.2 inches of net free area per running foot (full venting)

Coatings: Alumalure® 2000 by Alcoa® (double coat)
WeatherXL™ SMP by Sherwin-Williams® (Silicone Modified Polyester)
Fluropon® by Sherwin-Williams® PVDF (Kynar 500® or Hylar 5000®)
Fluropon® by Sherwin-Williams® PVDF 3 Coat (Kynar 500® or Hylar 5000®)
Super Dynapon by Sherwin-Williams® (ceramic pigment polyester coating)
AZ55 Galvalume® with Acrylic Coating


Field Conditions: Oil Canning is inherent in all light gauge metal products & is not a cause for rejection. Visit www.briggssteel.com/oilcanning for more information.

Accessories: Trim, Custom Trim, Fasteners, Sealant, Closures, Venting, Pipe Flashings, Underlayment, Snow Retention, Polycarbonate Panels, Many Tools.

More Details: For more information about this profile, please visit www.BriggsSteel.com

Note: For standard color selection, consult the current Briggs Steel Color Selection Guides. Custom colors are available upon request.
**Actual coverage may vary slightly due to the characteristics of the steel

Panel Fastening Pattern

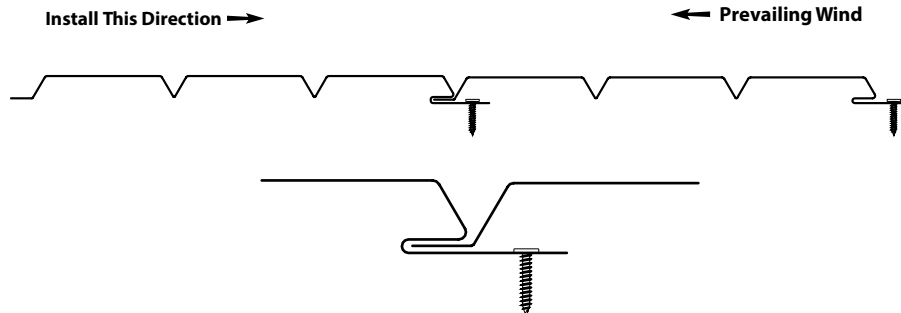

www.BriggsSteel.com

Toll-Free: (866) 724-7171

Phone: (208) 745-1500

Copyright © 2020 by Briggs Steel. All rights reserved. Rev 07/19.
Due to product advancements, changes and other factors, we reserve the right modify or delete the information herein without prior notice.