


(208) 745-1500

PBR PlusX™ Panel • 3/8" Corrugated Maxx™ • 3/4 Corrugated Maxx™
Tuff Rib PlusX™ • Inverted R-Panel WP™

STANDARD COLORS

Printed colors may vary from actual product. Metal samples available upon request. Please inquire for metal type, gauge, color, availability & lead times.



WINTER WHITE



LIGHT STONE



BEIGE



TAN



HICKORY



ASH GRAY



LIGHT GRAY



DARK GRAY



BURNISHED SLATE



MEDIUM BROWN



DARK BROWN



DARK RED




CRIMSON RED



DARK GREEN



FOREST GREEN



BLACK




COPPER METALLIC*

Many More Colors & Custom Colors Available



NON-PAINTED



GALVALUME® PLUS



GALVANIZED

*For ENERGY STAR® Solar Reflectance data, please see panel profile brochure(s).



-Steel Substrate Grade E (yield strength of 80,000 psi) & Grade D (yield strength of 50,000 psi)
-Substrate Coatings - Galvalume® AZ50, AZ55, AZ60, AZ70 & Galvanized G40, G60, G90, G100.
-Due to product advancements, changes and other factors, we reserve the right to modify or delete the information herein without prior notice.

-WeatherXL™ is a trademark of The Sherwin-Williams Company.
-Galvalume® is a registered trademark of BIEC International, Inc.
-Sherwin-Williams® is a registered trademark of The Sherwin-Williams Company.
-Protective film must be removed immediately after installation.

-ENERGY STAR® and the ENERGY STAR® mark are registered trademarks owned by the U.S. Environmental Protection Agency.
-Metallics are a premium cost & are batch sensitive, therefore variations are very common & expected to vary.

-For ENERGY STAR® Solar Reflectance data, please inquire for more information.
-Not all products listed offer 40 year paint warranty and warranties vary.
-Not all products qualify for ENERGY STAR® rating.
-Oil Canning is not a cause for rejection. See oil canning disclaimer.

EXPOSED FASTENING METAL ROOFING & SIDING

ProtectorX Series™

STANDARD PROFILES

Install This Direction →

← Prevailing Wind

Panel Fastening Pattern

Eaves, Ridges & End Laps Fastening Pattern

Panel Fastening Pattern

Eaves, Ridges & End Laps Fastening Pattern

Panel Fastening Pattern

Eaves, Ridges & End Laps Fastening Pattern

Panel Fastening Pattern

Eaves, Ridges & End Laps Fastening Pattern

Panel Fastening Pattern

Eaves, Ridges & End Laps Fastening Pattern

Panel Fastening Pattern

Eaves, Ridges & End Laps Fastening Pattern

Panel Fastening Pattern

Eaves, Ridges & End Laps Fastening Pattern

Panel Fastening Pattern

Eaves, Ridges & End Laps Fastening Pattern

Panel Fastening Pattern

Eaves, Ridges & End Laps Fastening Pattern

Panel Fastening Pattern

Eaves, Ridges & End Laps Fastening Pattern

Panel Fastening Pattern

Eaves, Ridges & End Laps Fastening Pattern

Best Seller

LARGE SELECTION OF PROFILES AVAILABLE

- 1/4" Corrugated Maxx™ Panel
- 1/2" Corrugated Maxx™ Panel
- 7/8" Corrugated Maxx™ Panel
- 7.2 PlusX™ Panel

- 5" K-Style InfinityX™
- 6" K-Style InfinityX™

- Sure Snap Seamless Batten
- Sure Lock Seamless Batten
- Rapid Snap NS100™
- Rapid Snap NS150™
- Sure Snap SL100™
- Sure Snap SL150™
- Sure Snap SL175 HD™
- Sure Lock ML100™
- Sure Lock ML150™
- Sure Lock ML200 HD™

- TripleX Soffit™
- QuadX Soffit™
- FlushX™ Panel
- Reveal FlushX™ Panel
- Slot Wall InfinityX™
- Sure Grip Board & Batten™
- Clad Lock InfinityX™

MANY MORE AVAILABLE


ACM Wall Systems (Composite)

Rainscreen Wet Seal

*Variable Sizes

WE OFFER MANY COLORS & PROFILES NOT INCLUDED ON THIS CHART

- Many other panel profiles are available. Please talk to representative for details.
- Standard & Custom trim available for all profiles and for profiles not listed.
- Custom trim options available for a variety of different applications.
- Large Inventory of Coil, Flat Sheet, Fasteners, Sealants & Accessories.

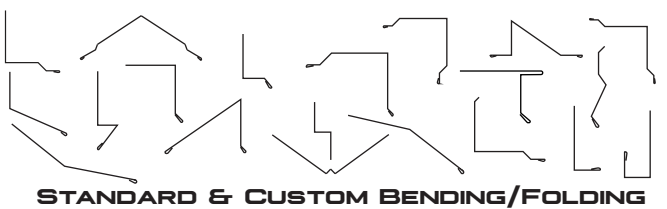

**Actual coverage may vary slightly due to the characteristics of the steel.
 •Please inquire for metal type, gauge, color, availability and lead times.
 •Protective film must be removed immediately after installation.
 •Please see product specification sheet for more details.
 •Oil Canning is not a cause for rejection.
 •Profiles are not to scale.

Toll-Free: (866) 724-7171
 Office: (208) 745-1500
 Email: sales@briggssteel.com
 Fax: (208) 745-0675

www.BriggsSteel.com
 4056 E 300 N
 Rigby, Idaho 83442



(208) 745-1500

Tuff Rib PlusX™ • 3/4" Corrugated Maxx™ • R-Panel SLW™
Inverted R-Panel SLW™

STANDARD COLORS

				
WINTER WHITE	LIGHT PARCHMENT	LIGHT STONE	IVORY	BEIGE
				
TAN	HICKORY	ASH GRAY	LIGHT GRAY	DARK GRAY
				
DESERT BROWN	BURNISHED SLATE	WEATHERED COPPER	MEDIUM BROWN	DARK BROWN
				
RUBY WINE	DARK RED	CRIMSON RED	HAWAIIAN BLUE	DARK BLUE
				
DARK GREEN	FOREST GREEN	SAGE GREEN	BLACK	COPPER METALLIC* (premium)

ECONOMY

		
GALVALUME® PLUS (29ga)	GALVANIZED (29ga)	LINER WHITE (Super Dynaplon®) Interior use only* 29ga

TEXTURED FINISHES

				
CHARCOAL TX	COCOA BROWN TX	BURNISHED SLATE TX	RUSTIC RED TX	EVERGREEN TX
	WeatherXL™ Crinkle Finishes by Sherwin-Williams®			
BLACK TX	Many More Colors & Custom Colors Available 			

*For ENERGY STAR® Solar Reflectance data, please see panel profile brochure(s).



-Steel Substrate Grade E (yield strength of 80,000 psi) & Grade D (yield strength of 50,000 psi)
-Substrate Coatings - Galvalume® AZ50, AZ55, AZ60, AZ70 & Galvanized G40, G60, G90, G100.
-Protective film must be removed immediately after installation.
-Due to product advancements, changes and other factors, we reserve the right to modify or delete the information herein without prior notice.

-WeatherXL™ is a trademark of The Sherwin-Williams Company.
-Super Dynaplon® is a registered trademark of The Sherwin-Williams Company.
-Galvalume® is a registered trademark of BIEC International, Inc.
-Sherwin-Williams® is a registered trademark of The Sherwin-Williams Company.
*Liner White is coated with Super Dynaplon® Polyester and is for indoor use only.




-ENERGY STAR® and the ENERGY STAR® mark are registered trademarks owned by the U.S. Environmental Protection Agency.
-Texture Finishes, Specialty Colors, Natural Metals & Non-Painted are batch sensitive and therefore variations are very common and expected to vary.

*Metallics are a premium cost & batch sensitive, therefore variations are very common & expected to vary.
-Not all products listed offer 40 year paint warranty and warranties vary.
-Not all products qualify for ENERGY STAR® rating.
-Oil Canning is not a cause for rejection. See oil canning disclaimer.

EXPOSED FASTENING METAL ROOFING & SIDING

ProtectorX Series™

STANDARD PROFILES

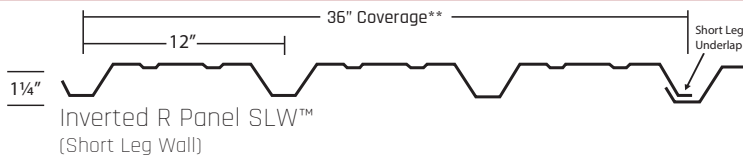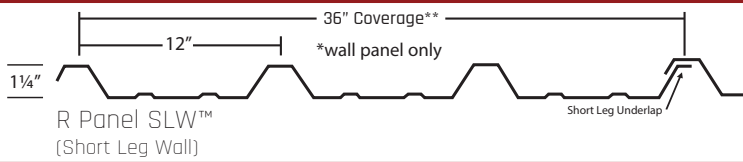

Install This Direction →

← Prevailing Wind

Panel Fastening Pattern

Eaves, Ridges & End Laps Fastening Pattern

Panel Fastening Pattern

Eaves, Ridges & End Laps Fastening Pattern

Panel Fastening Pattern

Eaves, Ridges & End Laps Fastening Pattern




Panel Fastening Pattern

Panel Fastening Pattern




Typical Fastener Spacing
- 24" on center max spacing (see panel load table)
*The above diagrams are the typical fastener pattern based on the live load table. However pattern & spacing may not be appropriate for all applications. Consult local building codes and/or professional engineer for alternative use.

LARGE SELECTION OF PROFILES AVAILABLE

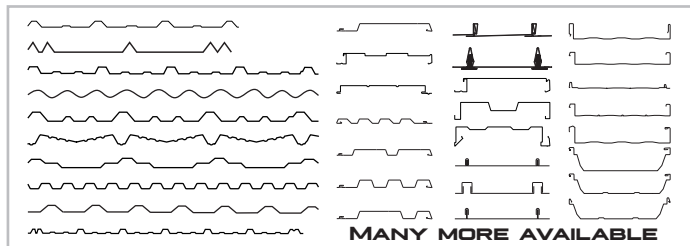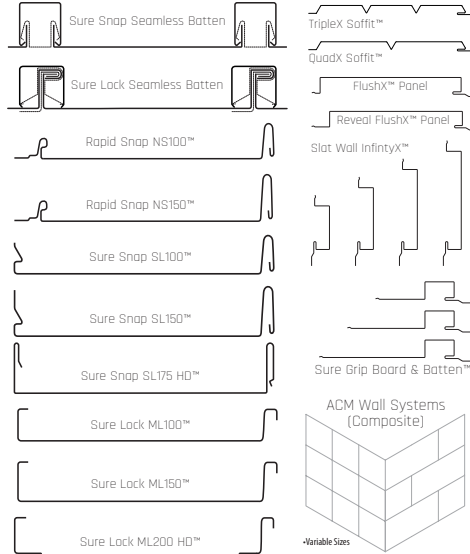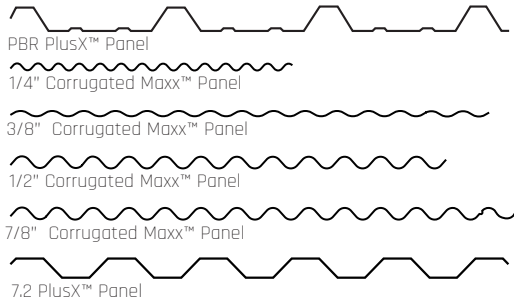

WE OFFER MANY COLORS & PROFILES NOT INCLUDED ON THIS CHART

- Many other panel profiles are available. Please talk to representative for details.
- Standard & Custom trim available for all profiles and for profiles not listed.
- Custom trim options available for a variety of different applications.
- Large Inventory of Coil, Flat Sheet, Fasteners, Sealants & Accessories.

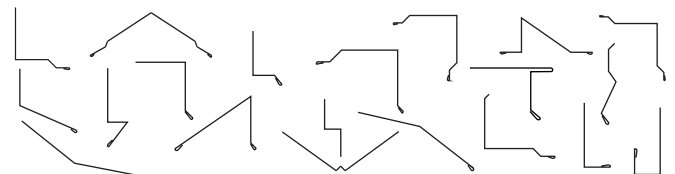

STANDARD & CUSTOM BENDING/FOLDING

- **Actual coverage may vary slightly due to the characteristics of the steel.
- Please inquire for metal type, gauge, color, availability and lead times.
- Protective film must be removed immediately after installation.
- Please see product specification sheet for more details.
- Oil Canning is not a cause for rejection.
- Profiles are not to scale.

Toll-Free: (866) 724-7171
Office: (208) 745-1500
Email: sales@briggssteel.com
Fax: (208) 745-0675

www.BriggsSteel.com

4056 E 300 N
Rigby, Idaho 83442

