Simulated TimberX Series[™]

Reclaimed Timber

letal samples available upon request. Please inquire for metal type, gauge, color, availability & lead times.



PLAIN CUT



QUARTER CUT



RIFT CUT



LIVE CUT

English Walnut



COLONIAL WALNUT

HERITAGE WALNUT



VINTAGE WALNUT



LEGACY WALNUT

Varity Woodgrain



ENGLISH CHESTNUT



RED CHESTNUT



GOLDEN OAK



GUNSTOCK



AGED TIMBER



SEDONA RED



JACOBEAN



PROVIDENCE



PVDF Kynar 500° Hylar[®] 5000

•For ENERGY STAR® Solar Reflectance data, please see panel profile brochure(s).


Printed colors may vary from actual product. Metal samples available upon request. Please inquire for metal type, gauge, color, availability & lead times.

+Steel Substrate Grade E (yield strength of 80,000 psi) & Grade D Vield strength of 50,000 psi Substrate Coatings – Galvalume[®] AZ50, AZ55, AZ60, AZ70 & Galvanized G40, G60, G90, G100. reserve the right to modify or delete the information herein without prior notice.

A local sequence of the advecting and the sequence of the

•WeatherXL[™] is a trademark of The Sherwin-Williams Company. •ENERGY STAR® and the ENERGY STAR® mark are registered trademarks owned by thot all products listed offer 40 year paint warranty and

FacadeX Series[™] Wall Systems

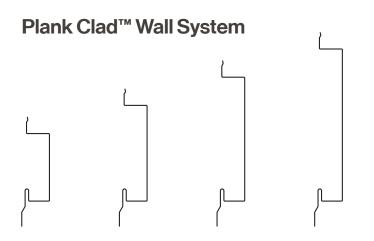

Sure Lock Seamless Batten™




Flush InfinityX[™] Panel

<u> </u>	~ ~	_	~ ~	_	~ ~		~
Г	-	Γ	-	Γ	-	Γ	-
-	•		•				

Flush InfinityX[™] Reveal Panel



Clad Board InfinityX[™]

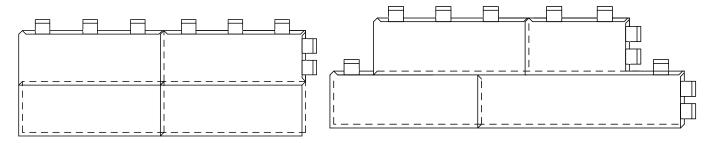

STANDARD & CUSTOM BENDING/FOLDING

Clad Board InfinityX[™] is a custom panel designed and fabricated to your specifications.

Copyright © 2020 by Briggs Steel. All rights reserved. Rev 05/20. Due to product advancements, changes and other factors, we reserve the right to modify or delete the information herein without prior notice. *Actual coverage may vary slightly due to the characteristics of the steel.
•Please inquire for metal type, gauge, color, availability and lead times.
•Protective film must be removed immediately after installation.
•Please see product specification sheet for more details.
•Oil Canning is not a cause for rejection.
•Profiles are not to scale.

Sure Grip Board & Batten™



Sure Snap Seamless Batten™

