

FacadeX Series / Flat Plate Panels

Product Highlights

Flat Plate Panels are a unique wall system that is an incredibly tough panel that offers a look that can be modern or rustic with nearly unlimited possible options.

Materials Available

29ga, 28ga, 26ga, 24ga, 22ga, 20ga, 18ga, 16ga, 14ga, 12ga, 10ga Steel Sheet

8ga - 8" Steel Plate

16oz, 20oz, 24oz, 32oz, 48oz, 56oz, 64oz, 72oz, 80oz, 96oz Natural Copper

0.7mm, 0.8mm, 1.00mm, 1.2mm, 1.5mm Natural Zinc


0.032" - 0.125" Aluminum

WeatherXL™ SMP by Sherwin-Williams®
 Fluoropon® by Sherwin-Williams® PVDF (Kynar 500®)

Cold Rolled Weathering Steel
 A606-4 (Corten) Weathering Steel
 Hot Rolled Weathering Steel
 Vintage®

Western Rust
 Cor-Ten AZP® Raw
 Copper-Ten® Raw
 Galv-Ten® Raw
 Galvalume® (Acrylic Coating)

Galvanized
 Electro-Galvanized
 Galvannealed
 Bonderized Weathering Steel
 ReziBond® Weathering Steel
 Hammered Copper
 (See Color Guide(s) for Many More Options)

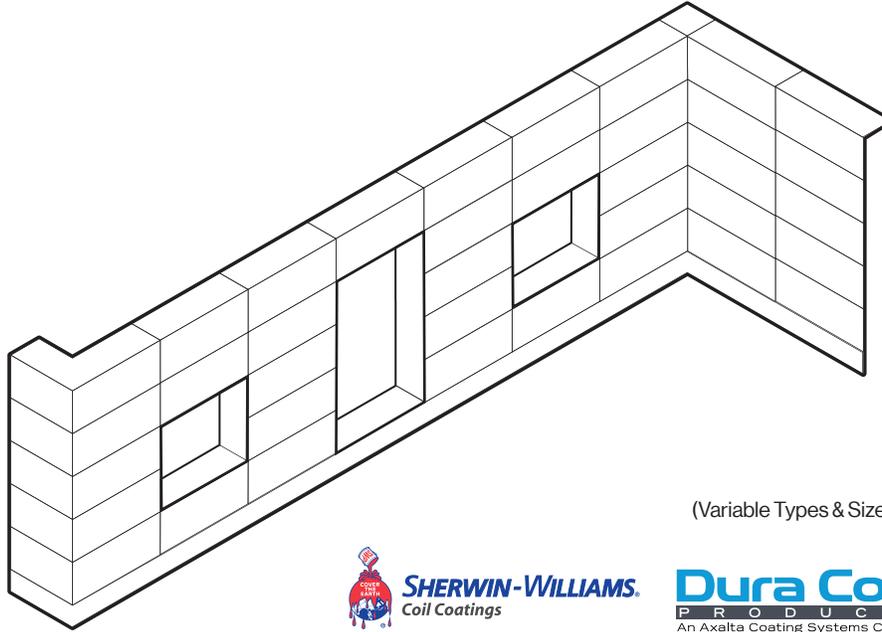

(Variable Types & Sizes)



SHERWIN-WILLIAMS
 Coil Coatings

Dura Coat
 PRODUCTS
 An Axalta Coating Systems Company

Product Specifications


<p>! Applications: Wall, Soffit, Fascia</p> <p>! Coverage: Custom Widths & Lengths</p> <p>! Fastening System: Exposed Fastening</p> <p>! Substrate Install: Solid or Open Purlin System</p> <p>! Thickness: 29ga, 28ga, 26ga, 24ga, 22ga, 20ga, 18ga, 16ga, 14ga, 12ga, 10ga Steel Sheet</p> <p>8ga - 8" Steel Plate</p> <p>16oz, 20oz, 24oz, 32oz, 48oz, 56oz, 64oz, 72oz, 80oz, 96oz Natural Copper</p> <p>0.7mm, 0.8mm, 1.00mm, 1.2mm, 1.5mm Natural Zinc</p> <p>0.032" - 0.125" Aluminum</p>	<p>! Coatings: WeatherXL™ SMP by Sherwin-Williams® (Silicone Modified Polyester) Fluoropon® by Sherwin-Williams® PVDF (Kynar 500® or Hylar 5000®) Fluoropon® by Sherwin-Williams® PVDF 3 Coat (Kynar 500® or Hylar 5000®) Super Dynapox by Sherwin-Williams® (ceramic pigment polyester coating) AZ55 Galvalume® with Acrylic Coating</p> <p>! Substrate: AZ50 Galvalume® Grade E (yield strength of 80,000 psi) (optional) AZ50 Galvalume® G60, G90, G100 Galvanized (optional) Grade D (yield strength of 50,000 psi) (optional) Embossing Available</p> <p>! Fielding Conditions: Oil Canning is inherent in all light gauge metal products & is not a cause for rejection. Visit www.briggssteel.com/oilcanning for more information.</p> <p>! Accessories: Trim, Custom Trim, Fasteners, Sealant, Closures, Venting, Pipe Flashings, Underlayment, Snow Retention, Polycarbonate Panels, Many Tools.</p> <p>! More Details: For more information about this profile, please visit www.BriggsSteel.com</p>
---	---

Protective Film Available Upon Request


Note: For standard color selection, consult the current Briggs Steel Color Selection Guides. Custom colors are available upon request.
 **Actual coverage may vary slightly due to the characteristics of the steel.

Variable, Sizes, Types and Patterns


Square



Square Staggered

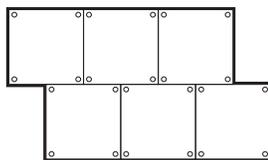

Rectangle

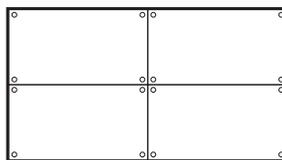

Rectangle Staggered

