


UltimateX Series / Sure Grip Board & Batten™

Product Highlights

The Architectural Sure Grip Board & Batten™ panel profile is a clean designed panel that is known for its classic board & batten look. This panel can be fabricated in a 26ga, 24ga or 22ga. Another great option for this panel is the ability to run On-Site for those longer panels that are difficult to handle. Rollforming on-site can help reduce shipping costs and damage to the panels in the shipping process. This wall panel can be installed Vertically or Horizontally.

On-Site Rollforming Available for this Panel

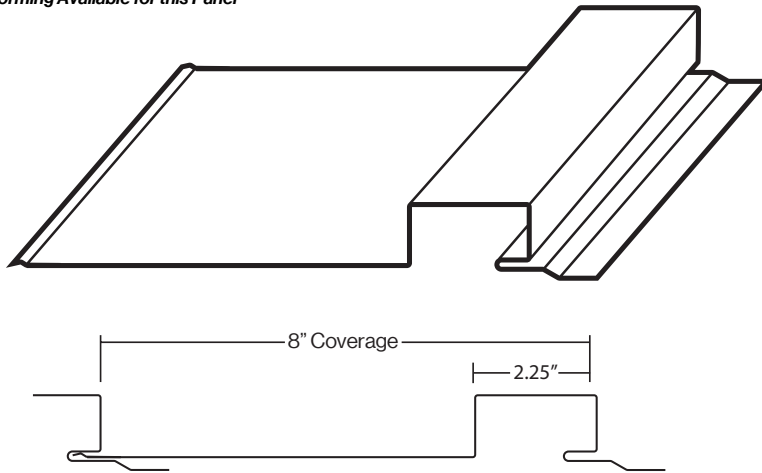

Materials Available

26ga, 24ga, 22ga Steel

0.032" Aluminum

16oz, 20oz Natural Copper

WeatherXL™ SMP by Sherwin-Williams®

Fluropon® by Sherwin-Williams® PVDF (Kynar 500®)

Textured / Crinkle (Rawhide)

Vintage®

Western Rust

Cor-Ten AZP® Raw

Copper-Ten® Raw

Galv-Ten® Raw

Galvalume® (Acrylic Coating)

Galvanized

Electro-Galvanized

Galvannealed

Bonderized Weathering Steel

ReziBond® Weathering Steel

Cold Rolled Weathering Steel

A606-4 (Corten) Weathering Steel

Hammered Copper

Stainless Steel

Perforated

(See Color Guide(s) for Many More Options)



SHERWIN-WILLIAMS
Coil Coatings

Dura Coat
PRODUCTS
An Axalta Coating Systems Company

Product Specifications

Applications:	Wall, Soffit, Ceiling, Interior	Thickness:	24ga High Quality Grade D Steel (yield strength of 50,000 psi) (optional) 26ga, 22ga (Please inquire for more available thicknesses)
Coverage:	Standard Widths: 8"	Coatings:	Fluropon® by Sherwin-Williams® PVDF (Kynar 500® or Hylar 5000®) Fluropon® by Sherwin-Williams® PVDF 3 Coat (Kynar 500® or Hylar 5000®) WeatherXL™ SMP by Sherwin-Williams® (Silicone Modified Polyester) Super Dynapon by Sherwin-Williams® (ceramic pigment polyester coating) AZ55 Galvalume® with Acrylic Coating
Rib Height:	¾" Tall Rib	Substrate:	G90 Galvanized Grade D (yield strength of 50,000 psi) (optional) AZ50, AZ55 Galvalume®, G100 Galvanized (optional) Embossing Available
Fastening System:	Concealed Fastening with Built-In Fastening Strip	Accessories:	Trim, Custom Trim, Fasteners, Sealant, Closures, Venting, Pipe Flashings, Underlayment, Snow Retention, Polycarbonate Panels, Many Tools.
Length(s):	Maximum Length of 48' 0" Minimum Length of 3' 0" (contact representative for special consideration on panels over 15' 0") (Oblong notcher available for panels longer than 15')	Fielding Conditions:	Oil Canning is inherent in all light gauge metal products & is not a cause for rejection. Visit www.briggssteel.com/oilcanning for more information.
Sealant:	(Optional butyl tape sealant)	More Details:	For more information about this profile, please visit www.BriggsSteel.com
Substrate Install:	Solid/Open Purlin System		

Protective Film Available Upon Request

Note: For standard color selection, consult the current Briggs Steel Color Selection Guides. Custom colors are available upon request.

**Actual coverage may vary slightly due to the characteristics of the steel.


Install This Direction →

← Prevailing Wind



Typical Fastener Spacing

- 3" on center max for 8" panel widths



*The above diagrams are the typical fastener pattern. However pattern & spacing may not be appropriate for all applications. Consult local building codes and/or professional engineer for alternative use.