

MAXX™ SteelBinder®


Features and Benefits

- Fastener designed to attach metal roof and sidewall panels used in pre-engineered metal building applications.
- #12 Diameter 5/16" Cupped HWH self-drilling fastener easily penetrates steel up to .210" in thickness with no "point walking." 1/4" Stitch will securely fasten 2 layers of 26 GA with no strip-out.
- Cupped head & washer encapsulate EPDM rubber washer & provide a secure seal even when driven at an angle.

ALL UNPAINTED MAXX STEELBINDER® FASTENERS COME STANDARD WITH DURASEAL® PLUS ENHANCED CORROSION RESISTANCE COATING.

FOR PROPER INSTALLATION, THE USE OF IMPACT DRIVERS ARE NOT RECOMMENDED FOR POWDER COATED OR ANY WET PAINTED FASTENER.

PULLOUT & PULL OVER VALUES ARE DETERMINED IN THE ST FASTENING SYSTEMS ENGINEERING LABORATORY USING STEEL PANELS/FRAMING & WOOD DENSITIES WHOSE STRUCTURAL PROPERTIES ARE FOUND IN PRESENT DAY PRODUCTS.

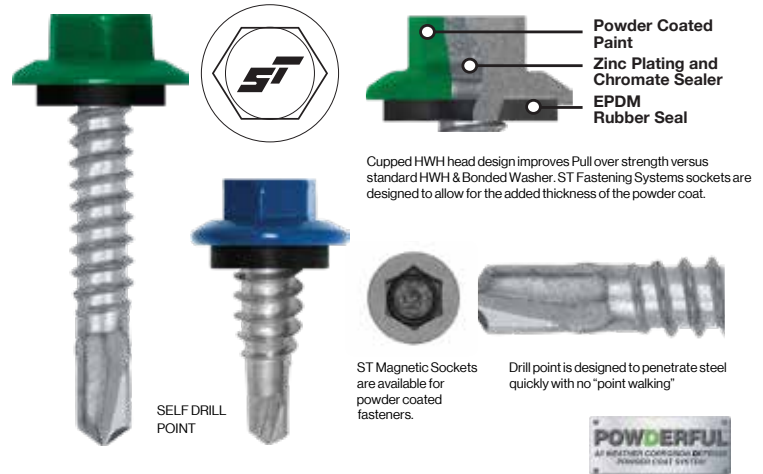

Cupped HWH head design improves Pull over strength versus standard HWH & Bonded Washer. ST Fastening Systems sockets are designed to allow for the added thickness of the powder coat.

ST Magnetic Sockets are available for powder coated fasteners. Drill point is designed to penetrate steel quickly with no "point walking"



SIZE	CARTON QTY.	WEIGHT/M
12-14 x 3/4"	2500	11.3
12-14 x 1"	2500	13.2
12-14 x 1-1/4"	2500	14.8
12-14 x 1-1/2"	2000	15.5
12-14 x 2"	1500	18.8
12-14 x 2-1/2"	1500	24.6
12-14 x 3"	1000	26.6
1/4 X 7/8" STITCH*	2500	13.4

*CURRENT SIZES AVAILABLE WITH POWDER COATING

PULL OVER STRENGTH LBS. ULT.

SUBSTRATE	GAUGE	THICKNESS	VALUE
HRS Primed Only #12	16	.060	927
HRS Primed Only #12	14	.075	958
HRS Primed Only #12	12	.105	1678
AZ55 Galvalume 1/4"	26	.018	342
AZ55 Galvalume 1/4"	24	.024	378
AZ55 Galvalume 1/4"	22	.030	418
AZ55 Galvalume 1/4"	18	.048	1038
G-90 Galvanized #12	20	.036	620
G-90 Galvanized #12	18	.048	729
G-90 Galvanized #12	16	.060	787
G-90 Galvanized #12	14	.075	1041
G-90 Galvanized #12	12	.105	1372

PULL OVER STRENGTH LBS. ULT.

SUBSTRATE	GAUGE	THICKNESS	VALUE
AZ55 Galvalume #12	29	.014	687
AZ55 Galvalume #12	26	.018	1090
AZ55 Galvalume #12	24	.024	1299
AZ55 Galvalume #12	22	.030	1562
AZ55 Galvalume 1/4"	29	.014	746
AZ55 Galvalume 1/4"	26	.018	960
AZ55 Galvalume 1/4"	24	.024	1261
AZ55 Galvalume 1/4"	22	.030	1376


NOTES

1. HRS (Hot Rolled Steel)
2. Pull over values calculated with EPDM rubber washer assembled to cupped head screw with .555" washer face.
3. All strength values shown are ultimate values, expressed in LBS. Apply an appropriate safety factor to obtain design limits.

HEAD STYLE	5/16" CHWH**
POINT DIAMETER	.181/.177 .156/.150 STITCH
MAJOR DIAMETER	.215/.209 .246/.240 STITCH
MINOR DIAMETER	.164/.157 .192/.185 STITCH
WASHER FACE DIAMETER	.560/.545 .560/.545 STITCH
HEAD ACROSS FLATS	NOM .312" NOM .312"
NOM. TENSILE STRENGTH	2900 LBS. 3800 LBS. STITCH
MIN. TORSIONAL STRENGTH	92 IN-LBS. 150 IN-LBS. STITCH
NOM. SHEAR STRENGTH	1962 LBS. 2850 LBS. STITCH

**CHWH-CUPPED HEX WASHER HEAD

Applications

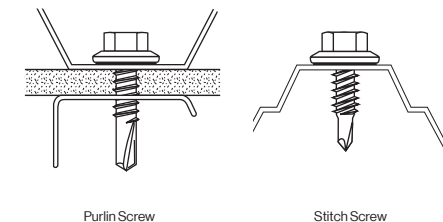

Purlin Screw

Stitch Screw

6357 Reynolds Road Tyler, Texas 75708 | P.O. Box 4515, Tyler, Texas 75712 | 800-352-4864 | 800-352-3940 Fax
9950 Princeton Glendale Rd. Cincinnati, OH 45246 | 800-944-8920 | 800-352-3940 Fax
Copyright 2017 © ST Fastening Systems, Division of The Hillman Group. All rights reserved.

ARCHITECTURAL
S E R I E S

