


2 Vant Hale



## **Product Highlights**

EZ Vent-N-Closure is a great option for a variety of Watertight Type Applications; designed to fit most any panel with ease of install, incredibly durable and watertight this product is second to none.


\*Also available in a vented version for a variety of application methods. Please see vented data sheet for details.

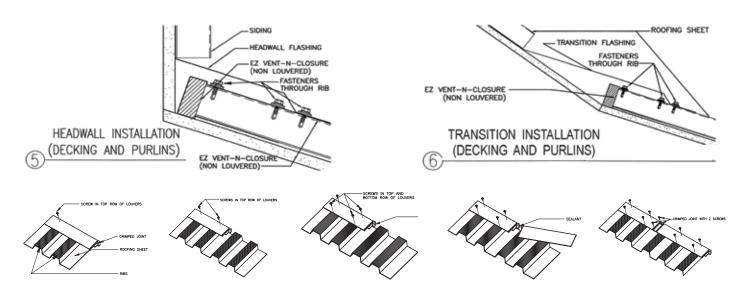

## **Product Specifications**

Applications:	Headwall, Transition, Ridge, Roof Hip (New or Retrofit Construction)
Length:	60" in length with a connecting joint
Height:	0.75", 0.875", 1.00", 1.25", 1.50", 1.75", 2.00" (Custom Sizes Available)
Minimum Slope:	14:12 Pitch or greater
Fastener:	Concealed under cover trim
Substrate Install:	Solid / Open Purlin
Materials:	26ga High Quality Grade E (yield strength of 80,000 psi) with built-in foam closure
Venting:	Non-Vented (vented version available)
Warranty:	Limited Lifetime Watertight Warranty
Testing:	Tested in Accordance with TAS-100A (110 MPH Wind Driven Rain Test)

\*Please inquire for full installation instructions. Transition Trim



www.BriggsSteel.com

Call or Text: (208) 745-1500

Toll-Free: (877) 95-STEEL

Copyright © 2023 by Briggs Steel, Inc. All rights reserved. Rev 04/23. Due to product advancements, changes and other factors, we reserve the right modify or delete the information herein without prior notice.