

(208) 745-1500

Tuff Rib PlusX™ • 3/4" Corrugated Maxx™ • R-Panel SLW™
Inverted R-Panel SLW™

STANDARD COLORS

				
WINTER WHITE	LIGHT PARCHMENT	LIGHT STONE	IVORY	BEIGE
				
TAN	HICKORY	ASH GRAY	LIGHT GRAY	DARK GRAY
				
DESERT BROWN	BURNISHED SLATE	WEATHERED COPPER	MEDIUM BROWN	DARK BROWN
				
RUBY WINE	DARK RED	CRIMSON RED	HAWAIIAN BLUE	DARK BLUE
				
DARK GREEN	FOREST GREEN	SAGE GREEN	GLOSS BLACK	ONYX BLACK

ECONOMY

		
GALVALUME® PLUS (29ga)	GALVANIZED (29ga)	LINER WHITE (Super Dynaplon®) Interior use only* 29ga

PREMIUM


COPPER METALLIC* (premium)

TEXTURED FINISHES

WeatherXL™ Crinkle Finishes by Sherwin-Williams®

				
CHARCOAL TX	COCOA BROWN TX	BURNISHED SLATE TX	EVERGREEN TX	BLACK TX

LOW GLOSS FINISHES

				
LOW GLOSS BLACK	LOW GLOSS BURNISHED SLATE	LOW GLOSS HICKORY	LOW GLOSS DARK GRAY	LOW GLOSS MEDIUM BROWN

*For ENERGY STAR® Solar Reflectance data, please see panel profile brochure(s).



Many More Colors & Custom Colors Available



-Steel Substrate Grade E (yield strength of 80,000 psi) & Grade D (yield strength of 50,000 psi)
-Substrate Coatings - Galvalume® AZ50, AZ55, AZ60, AZ70 & Galvanized G40, G60, G90, G100.
-Protective film must be removed immediately after installation.
-Due to product advancements, changes and other factors, we reserve the right to modify or delete the information herein without prior notice.

-WeatherXL™ is a trademark of The Sherwin-Williams Company.
-Super Dynaplon™ is a registered trademark of The Sherwin-Williams Company.
-Galvalume® is a registered trademark of BIEC International, Inc.
-Sherwin-Williams® is a registered trademark of The Sherwin-Williams Company.
*Liner White is coated with Super Dynaplon® Polyester and is for indoor use only.



-ENERGY STAR® and the ENERGY STAR® mark are registered trademarks owned by the U.S. Environmental Protection Agency.
-Texture Finishes, Specialty Colors, Natural Metals & Non-Painted are batch sensitive and therefore variations are very common and expected to vary.

*Metallics are a premium cost & batch sensitive, therefore variations are very common & expected to vary.
-Not all products listed offer 40 year paint warranty and warranties vary.
-Not all products qualify for ENERGY STAR® rating.
-Oil Canning is not a cause for rejection. See oil canning disclaimer.

EXPOSED FASTENING METAL ROOFING & SIDING

ProtectorX Series™

STANDARD PROFILES

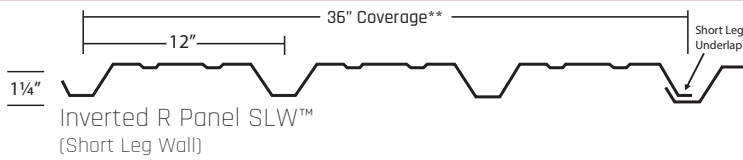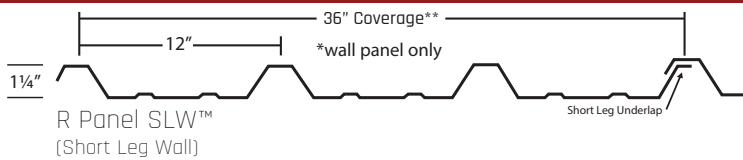

Install This Direction →

← Prevailing Wind

Panel Fastening Pattern

Eaves, Ridges & End Laps Fastening Pattern

Panel Fastening Pattern

Eaves, Ridges & End Laps Fastening Pattern

Panel Fastening Pattern

Eaves, Ridges & End Laps Fastening Pattern






Panel Fastening Pattern

Panel Fastening Pattern




Typical Fastener Spacing
- 24" on center max spacing (see panel load table)
*The above diagrams are the typical fastener pattern based on the live load table. However pattern & spacing may not be appropriate for all applications. Consult local building codes and/or professional engineer for alternative use.

LARGE SELECTION OF PROFILES AVAILABLE

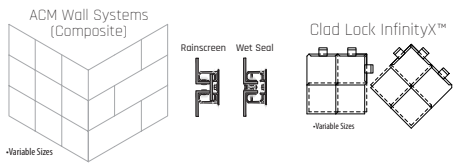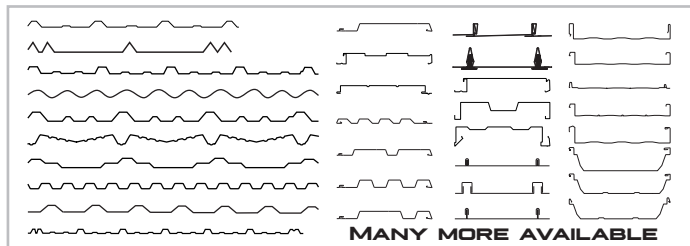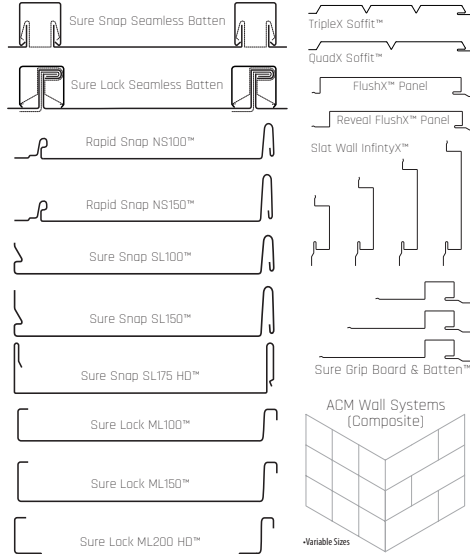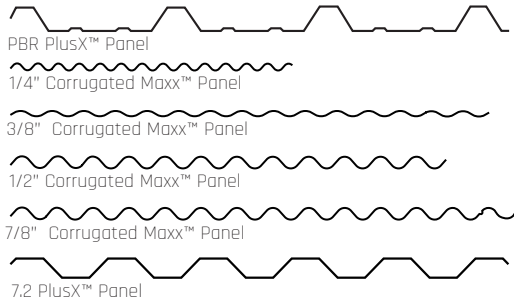

WE OFFER MANY COLORS & PROFILES NOT INCLUDED ON THIS CHART

- Many other panel profiles are available. Please talk to representative for details.
- Standard & Custom trim available for all profiles and for profiles not listed.
- Custom trim options available for a variety of different applications.
- Large Inventory of Coil, Flat Sheet, Fasteners, Sealants & Accessories.

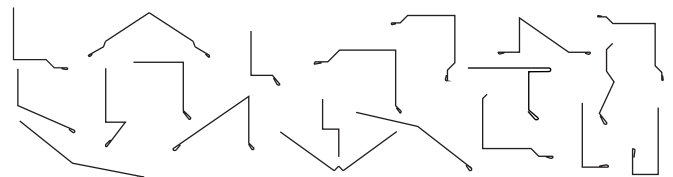

- **Actual coverage may vary slightly due to the characteristics of the steel.
- Please inquire for metal type, gauge, color, availability and lead times.
- Protective film must be removed immediately after installation.
- Please see product specification sheet for more details.
- Oil Canning is not a cause for rejection.
- Profiles are not to scale.

Toll-Free: (866) 724-7171
Office: (208) 745-1500
Email: sales@briggssteel.com
Fax: (208) 745-0675

www.BriggsSteel.com

4056 E 300 N
Rigby, Idaho 83442
















(208) 745-1500

PBR PlusX™ Panel • 3/8" Corrugated Maxx™ • 3/4 Corrugated Maxx™
Tuff Rib PlusX™ • Inverted R-Panel WP™

STANDARD COLORS



Printed colors may vary from actual product. Metal samples available upon request. Please inquire for metal type, gauge, color, availability & lead times.

				
WINTER WHITE	LIGHT STONE	BEIGE	TAN	HICKORY
				
ASH GRAY	LIGHT GRAY	DARK GRAY	BURNISHED SLATE	MEDIUM BROWN
				
DARK BROWN	DARK RED	CRIMSON RED	DARK GREEN	FOREST GREEN
				
BLACK	COPPER METALLIC*			

Many More Colors & Custom Colors Available



NON-PAINTED

	
GALVALUME® PLUS	GALVANIZED

•For ENERGY STAR® Solar Reflectance data, please see panel profile brochure(s).



SHERWIN-WILLIAMS.
Coil Coatings



•Steel Substrate Grade E (yield strength of 80,000 psi) & Grade D (yield strength of 50,000 psi)
•Substrate Coatings - Galvalume® AZ50, AZ55, AZ60, AZ70 & Galvanized G40, G60, G90, G100.
•Due to product advancements, changes and other factors, we reserve the right to modify or delete the information herein without prior notice.

•WeatherXL™ is a trademark of The Sherwin-Williams Company.
•Galvalume® is a registered trademark of BIEC International, Inc.
•Sherwin-Williams® is a registered trademark of The Sherwin-Williams Company.
•Protective film must be removed immediately after installation.

•ENERGY STAR® and the ENERGY STAR® mark are registered trademarks owned by the U.S. Environmental Protection Agency.
•Metallics are a premium cost & are batch sensitive, therefore variations are very common & expected to vary.

•For ENERGY STAR® Solar Reflectance data, please inquire for more information.
•Not all products listed offer 40 year paint warranty and warranties vary.
•Not all products qualify for ENERGY STAR® rating.
•Oil Canning is not a cause for rejection. See oil canning disclaimer.

EXPOSED FASTENING METAL ROOFING & SIDING

ProtectorX Series™

STANDARD PROFILES

Best Seller

Install This Direction →

← Prevailing Wind

Panel Fastening Pattern

Eaves, Ridges & End Laps Fastening Pattern

Panel Fastening Pattern

Eaves, Ridges & End Laps Fastening Pattern

Panel Fastening Pattern

Eaves, Ridges & End Laps Fastening Pattern

Panel Fastening Pattern

Eaves, Ridges & End Laps Fastening Pattern

Panel Fastening Pattern

Eaves, Ridges & End Laps Fastening Pattern

Panel Fastening Pattern

Eaves, Ridges & End Laps Fastening Pattern

Panel Fastening Pattern

Eaves, Ridges & End Laps Fastening Pattern

Panel Fastening Pattern

Eaves, Ridges & End Laps Fastening Pattern

Panel Fastening Pattern

Eaves, Ridges & End Laps Fastening Pattern

Panel Fastening Pattern

Eaves, Ridges & End Laps Fastening Pattern

Panel Fastening Pattern

Eaves, Ridges & End Laps Fastening Pattern

Panel Fastening Pattern

Eaves, Ridges & End Laps Fastening Pattern

Panel Fastening Pattern

Eaves, Ridges & End Laps Fastening Pattern

LARGE SELECTION OF PROFILES AVAILABLE

1/4" Corrugated Maxx™ Panel

1/2" Corrugated Maxx™ Panel

7/8" Corrugated Maxx™ Panel

7.2 PlusX™ Panel

5" K-Style InfinityX™

6" K-Style InfinityX™

Sure Snap Seamless Batten

Sure Lock Seamless Batten

Rapid Snap NS100™

Rapid Snap NS150™

Sure Snap SL100™

Sure Snap SL150™

Sure Snap SL175 HD™

Sure Lock ML100™

Sure Lock ML150™

Sure Lock ML200 HD™

TripleX Soffit™

QuadX Soffit™

FlushX™ Panel

Reveal FlushX™ Panel

Slot Wall InfinityX™

Sure Grip Board & Batten™

Clad Lock InfinityX™

ACM Wall Systems (Composite)

Rainscreen Wet Seal

Variable Sizes

Correct Fastening Depth

Correct Too Loose Too Tight

*Impact drivers not recommended for fastening.


Typical Fastener Spacing

-24" on center max spacing (see panel load table)

*The above diagrams are the typical fastener pattern based on the live load table. However pattern & spacing may not be appropriate for all applications. Consult local building codes and/or professional engineer for alternative use.

WE OFFER MANY COLORS & PROFILES NOT INCLUDED ON THIS CHART

- Many other panel profiles are available. Please talk to representative for details.
- Standard & Custom trim available for all profiles and for profiles not listed.
- Custom trim options available for a variety of different applications.
- Large Inventory of Coil, Flat Sheet, Fasteners, Sealants & Accessories.

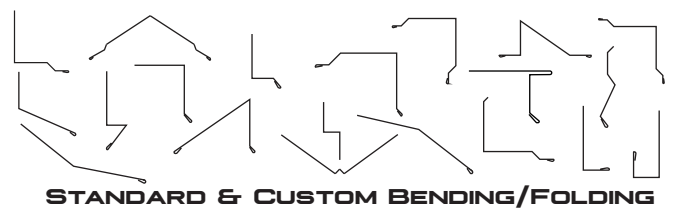

**Actual coverage may vary slightly due to the characteristics of the steel.
 •Please inquire for metal type, gauge, color, availability and lead times.
 •Protective film must be removed immediately after installation.
 •Please see product specification sheet for more details.
 •Oil Canning is not a cause for rejection.
 •Profiles are not to scale.

Toll-Free: (866) 724-7171
Office: (208) 745-1500
Email: sales@briggssteel.com
Fax: (208) 745-0675

www.BriggsSteel.com
4056 E 300 N
Rigby, Idaho 83442

