


Perforated G90 Galvanized Steel

3/32" Round on 3/16" Staggered Centers

Product Highlights

Perforated metal is used in a variety of applications such as, venting soffit, vented ridge, bug screen, fencing, decorative, and many more applications.

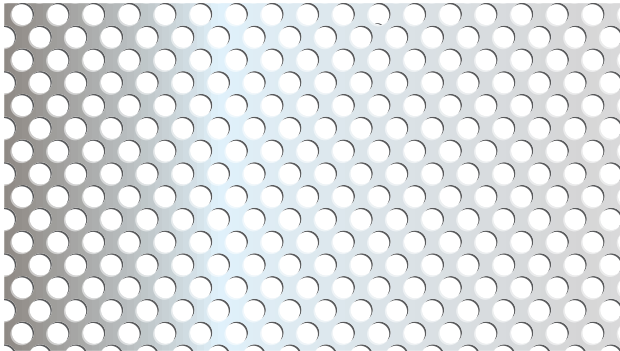

Product Specifications


Applications:	Ridge, Wall, Soffit, Fascia, Fencing, Ceiling, Interior
Available Panels:	PBR Panel, Inverted PBR Panel 1/2" Corrugated, 7/8" Corrugated, 7.2 Panel, Rapid Snap NS100™, Rapid Snap NS150™, Sure Snap SL100™, Sure Snap SL150™, Sure Snap SL175 HD™, Sure Lock ML100™, Sure Lock ML150™, Sure Lock ML200 HD™, Flush Wall Panel, Flush Soffit Panel, Clad Lock™ Panel, Flat Plate Panel.
Width:	48"
Thickness:	22ga (0.336") High Quality Grade D Steel (yield strength of 50,000 psi) (optional) 20ga, 18ga, 16ga, 14ga, 12ga
Substrate:	G90 Galvanized Steel
Hole Type:	Round
Hole Pattern:	3/32" Round on 3/16" Staggered Centers
Hole Arrangement:	60° Staggered Centers
Open Area:	23%
Hole Size:	3/32"
Hole Centers:	3/16"
Bar Width:	3/32"

Field Conditions:

Accessories:

More Details:

Disclaimer Attention:

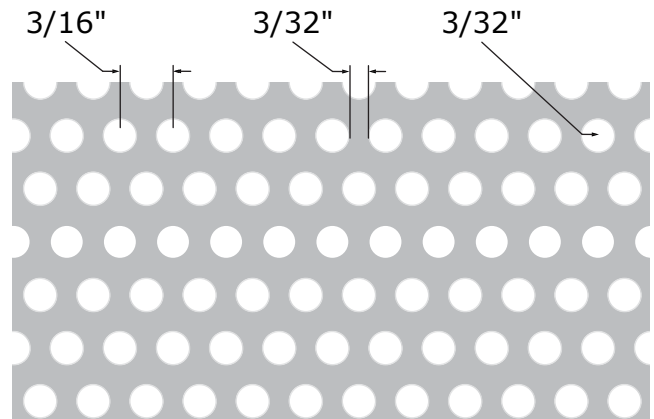

Not to Scale.

Note: For standard color selection, consult the current Briggs Steel Color Selection Guides. Custom colors are available upon request.

**Actual coverage may vary slightly due to the characteristics of the steel.