


FacadeX Series / Quad Four Soffit

Product Highlights

The Quad Four Soffit is a tough yet economical choice for your soffit needs. The sleek line and low profile make this soffit panel desirable. The Quad Four Soffit is ideal for Residential, Agricultural and Light Commercial building projects of all types. Combined with High Tensile formulated alloy for strength, the Quad Four Soffit that is easy to maintain and comes with up to a Limited Lifetime Warranty.

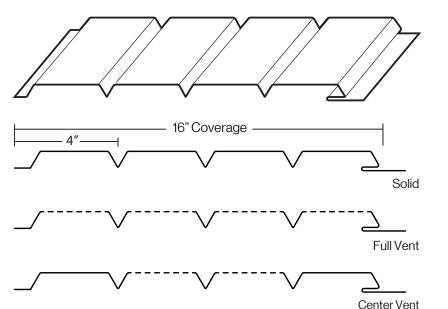

Materials Available

0.013", 0.016", 0.019", 0.032" Aluminum

29ga, 28ga, 26ga, 24ga, 22ga

16oz, 20oz, 24oz Natural Copper

Alumalure[®] 2000 by Alcoa[®] (double coat) WeatherXL[™] SMP by Sherwin-Williams[®] Fluropon[®] by Sherwin-Williams[®] PVDF (Kynar 500[®])

Textured / Crinkle (Rawhide) Vintage® Western Rust Cor-Ten AZP® Raw Copper-Ten® Raw Galv-Ten® Raw Galvalume® (Acrylic Coating) Galvanized Electro-Galvanized Galvannealed Bonderized Weathering Steel ReziBond® Weathering Steel Cold Rolled Weathering Steel A606-4 (Corten) Weathering Steel Hammered Copper Natural Zinc (See Color Guide(s) for Many More Options)






Product Specifications

Applications:	Wall, Soffit, Fascia, Ceiling, Interior	Coatings:	Alumalure [®] 2000 by Alcoa [®] (double coat)
Coverage:	16" Coverage	l e canniger	WeatherXL [™] SMP by Sherwin-Williams® (Silicone Modified Polyester) Fluropon® by Sherwin-Williams® PVDF (Kynar 500® or Hylar 5000®)
Fastening System:	Concealed Fastening		Fluropon® by Sherwin-Williams® PVDF 3 Coat (Kynar 500® or Hylar 5000®) Super Dynapon by Sherwin-Williams® (ceramic pigment polyester coating)
Substrate Install:	Solid/Open Purlin System		AZ55 Galvalume® with Acrylic Coating
Thickness:	0.019" (Please inquire for more available thicknesses)	Fielding Conditions:	Oil Canning is inherent in all light gauge metal products & is not a cause for rejection. Visit www.briggssteel.com/oilcanning for more information.
Substrate:	Aluminum		
Ventilations:	4.4 inches of net free area per running foot (center venting) 13.2 inches of net free area per running foot (full venting)	Accessories:	Trim, Custom Trim, Fasteners, Sealant, Closures, Venting, Pipe Flashings, Underlayment, Snow Retention, Polycarbonate Panels, Many Tools.
		More Details:	For more information about this profile, please visit www.BriggsSteel.com

Protective Film Available Upon Request

Note: For standard color selection, consult the current Briggs Steel Color Selection Guides. Custom colors are available upon request. **Actual coverage may vary slightly due to the characteristics of the steel.

Panel Fastening Pattern

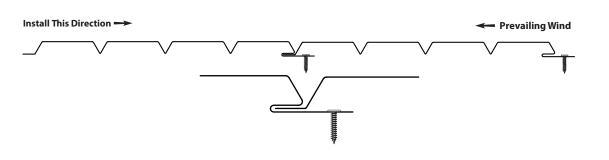

www.BriggsSteel.com

Phone: (208) 745-1500

Toll-Free: (877) 95-STEEL

Copyright © 2023 by Briggs Steel, Inc. All rights reserved. Rev 04/23. Due to product advancements, changes and other factors, we reserve the right modify or delete the information herein without prior notice.