


FacadeX Series / Triple Four Soffit

Product Highlights

Triple Four Soffit is one of the most commonly used soffit systems for the residential market. It's clean lines and affordability have made it a go to for the mass market. Available in many color options.

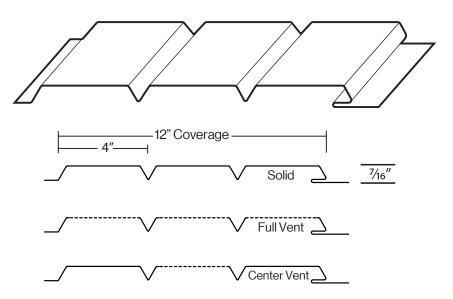

Materials Available

0.013", 0.016", 0.019", 0.032" Aluminum

29ga, 28ga, 26ga, 24ga, 22ga

16oz, 20oz, 24oz Natural Copper

Alumalure[®] 2000 by Alcoa[®] (double coat) WeatherXL[™] SMP by Sherwin-Williams[®] Fluropon[®] by Sherwin-Williams[®] PVDF (Kynar 500®)

Textured / Crinkle (Rawhide)
Vintage®
Western Rust
Cor-Ten AZP® Raw
Copper-Ten® Raw
Galv-Ten® Raw
Galvalume® (Acrylic Coating)
Galvanized
Electro-Galvanized
Galvannealed
Bonderized Weathering Steel
ReziBond [®] Weathering Steel
Cold Rolled Weathering Steel
A606-4 (Corten) Weathering Steel
Hammered Copper
Natural Zinc
(See Color Guide(s) for Many More Options)

SHERWIN-WILLIAMS


Product Specifications

Applications:	Wall, Soffit, Fascia, Ceiling, Interior	Coatings:	Alumalure® 2000 by Alcoa® (double coat) WeatherXL [™] SMP by Sherwin-Williams® (Silicone Modified Polyester) Fluropon® by Sherwin-Williams® PVDF (Kynar 500® or Hylar 5000®) Fluropon® by Sherwin-Williams® PVDF 3 Coat (Kynar 500® or Hylar 5000®) Super Dynapon by Sherwin-Williams® (ceramic pigment polyester coating) AZ55 Galvalume® with Acrylic Coating
Coverage:	12" Coverage		
Fastening System:	Concealed Fastening		
Substrate Install:	Solid/Open Purlin System		
Thickness:	0.019" (Please inquire for more available thicknesses)	¦ Fielding Conditions:	Oil Canning is inherent in all light gauge metal products & is not a cause for
Substrate:	Aluminum	Accessories:	rejection. Visit www.briggssteel.com/oilcanning for more information.
Ventilations:	4.4 inches of net free area per running foot (center venting) 13.2 inches of net free area per running foot (full venting)		Trim, Custom Trim, Fasteners, Sealant, Closures, Venting, Pipe Flashings, Underlayment, Snow Retention, Polycarbonate Panels, Many Tools.
		More Details:	For more information about this profile, please visit www.BriggsSteel.com

Protective Film Available Upon Request

Note: For standard color selection, consult the current Briggs Steel Color Selection Guides. Custom colors are available upon request **Actual coverage may vary slightly due to the characteristics of the steel.

Panel Fastening Pattern

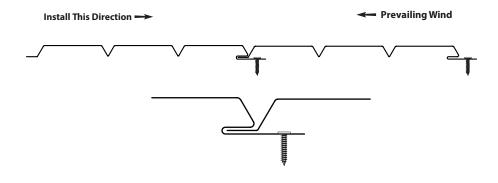

www.BriggsSteel.com

Phone: (208) 745-1500

Toll-Free: (877) 95-STEEL

Copyright © 2023 by Briggs Steel, Inc. All rights reserved. Rev 04/23. Due to product advancements, changes and other factors, we reserve the right modify or delete the information herein without prior notice.