


## FacadeX Series™ / Sure Grip Board on Board™

### Product Highlights

The Architectural Sure Grip Board on Board™ panel profile is a clean designed panel that is known for its classic board on board look. This panel can be fabricated in a 26ga, 24ga or 22ga. Another great option for this panel is the ability to run On-Site for those longer panels that are difficult to handle. Rollforming on-site can help reduce shipping costs and damage to the panels in the shipping process. This wall panel can be installed Vertically or Horizontally.

**On-Site Rollforming Available for this Panel**

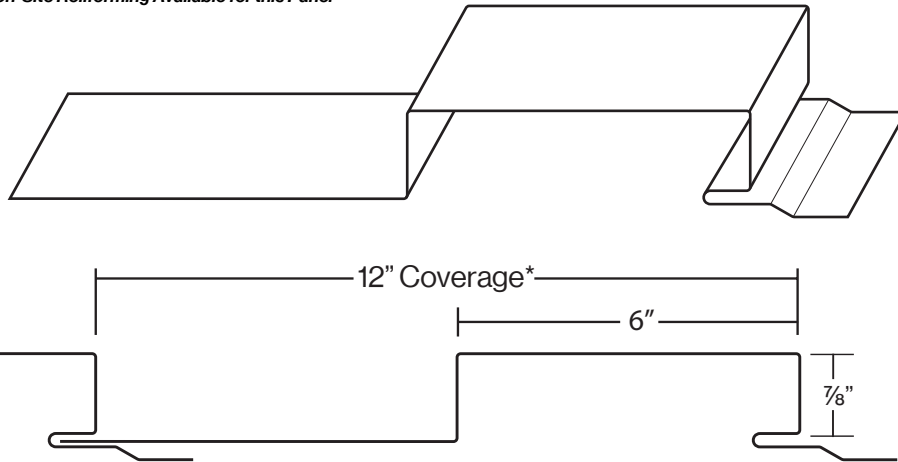

### Materials Available

26ga, 24ga, 22ga Steel

0.032" Aluminum

16oz, 20oz Natural Copper

0.7mm, 0.8mm Natural Zinc

WeatherXL™ SMP by Sherwin-Williams®

Fluropon® by Sherwin-Williams® PVDF (Kynar 500®)

Textured / Crinkle (Rawhide)

Vintage®

Western Rust

Cor-Ten AZP® Raw

Copper-Ten® Raw

Galv-Ten® Raw

Galvalume® (Acrylic Coating)

Galvanized

Electro-Galvanized

Galvannealed

Bonderized Weathering Steel

ReziBond® Weathering Steel

Cold Rolled Weathering Steel

A606-4 (Corten) Weathering Steel

Hammered Copper

Stainless Steel

Perforated

(See Color Guide(s) for Many More Options)



### Product Specifications

<b>Applications:</b>	Wall, Soffit, Ceiling, Interior	<b>Thickness:</b>	24ga High Quality Grade D Steel (yield strength of 50,000 psi) (optional) 26ga, 22ga (Please inquire for more available thicknesses)
<b>Coverage:</b>	Standard Widths: 12"	<b>Coatings:</b>	Fluropon® by Sherwin-Williams® PVDF (Kynar 500® or Hylar 5000®) Fluropon® by Sherwin-Williams® PVDF 3 Coat (Kynar 500® or Hylar 5000®) WeatherXL™ SMP by Sherwin-Williams® (Silicone Modified Polyester) Super Dynapon by Sherwin-Williams® (ceramic pigment polyester coating) AZ55 Galvalume® with Acrylic Coating
<b>Rib Height:</b>	7/8" Tall Rib	<b>Substrate:</b>	G90 Galvanized Grade D (yield strength of 50,000 psi) (optional) AZ50, AZ55 Galvalume®, G100 Galvanized (optional) Embossing Available
<b>Fastening System:</b>	Concealed Fastening with Built-In Fastening Strip	<b>Accessories:</b>	Trim, Custom Trim, Fasteners, Sealant, Closures, Venting, Pipe Flashings, Underlayment, Snow Retention, Polycarbonate Panels, Many Tools.
<b>Length(s):</b>	Maximum Length of 48' 0" Minimum Length of 3' 0" (contact representative for special consideration on panels over 15' 0") (Oblong notcher available for panels longer than 15' 0")	<b>Fielding Conditions:</b>	Oil Canning is inherent in all light gauge metal products & is not a cause for rejection. Visit <a href="http://www.briggssteel.com/oilcanning">www.briggssteel.com/oilcanning</a> for more information.
<b>Sealant:</b>	(Optional butyl tape sealant)	<b>More Details:</b>	For more information about this profile, please visit <a href="http://www.BriggsSteel.com">www.BriggsSteel.com</a>
<b>Substrate Install:</b>	Solid/Open Purlin System		

### Protective Film Available Upon Request

Note: For standard color selection, consult the current Briggs Steel Color Selection Guides. Custom colors are available upon request.

\*A606-4 (Corten), Bare Cold Rolled, Galvanized, Electro-Galvanized will have a total coverage of 11%.

\*\*Actual coverage may vary slightly due to the characteristics of the steel.


Install This Direction →

Prevailing Wind →



Typical Fastener Spacing

- 3" on center max for 12" panel widths



\*The above diagrams are the typical fastener pattern. However screw length, type, pattern, substrate, panel length and spacing may not be appropriate for all applications. Consult the local building codes for your area, and/or professional engineer for alternative use.