


Technical Information Concealed Fastening System




GuardianX Series / Sure Snap SL150

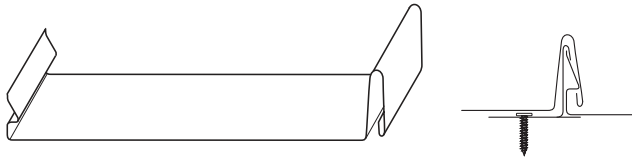

Product Highlights

The 1½" Sure Snap SL150™ Panel is a Architectural Standing Seam Metal Roof Panel that has all fasteners concealed for a sleek look and most importantly incredible strength and weather resistance. This Metal Roofing Panel uses a clip system that allows the panel to float for the expansion and contraction of the steel. When using an 18ga Clip, this panel has incredible wind resistance. This Standing Seam Metal Roof Panel comes in a variety of standard widths and colors, but can be customized to the needs that you are looking for. This panel can be rollformed on-site or at our facility in Rigby, Idaho. Rollforming on-site can help reduce shipping costs and damage to the panels in the shipping process.

On-Site Rollforming Available for this Panel

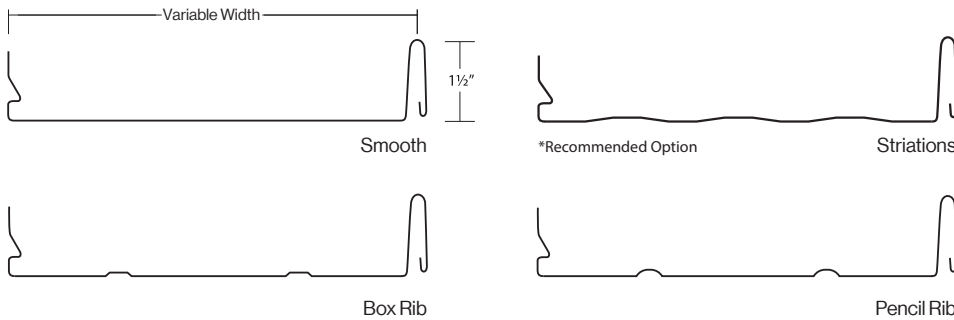

Product Specifications

Applications:	Roofing, Wall, Soffit, Fascia, Interior	Thickness:	24ga High Quality Grade D Steel (yield strength of 50,000 psi) (optional) 26ga, 22ga (Please inquire for more available thicknesses)
Coverage:	Standard Widths: 10 ¾", 16", 18 ¾" (Custom Widths from 8" to 25 1/2")	Coatings:	Fluropon® by Sherwin-Williams® PVDF (Kynar 500® or Hylar 5000®) Fluropon® by Sherwin-Williams® PVDF 3 Coat (Kynar 500® or Hylar 5000®) WeatherXL™ SMP by Sherwin-Williams® (Silicone Modified Polyester) Super Dynapon by Sherwin-Williams® (ceramic pigment polyester coating) AZ55 Galvalume® with Acrylic Coating
Rib Heights:	1 ½" Tall Standing Seam Rib	Substrate:	G90 Galvanized Grade D (yield strength of 50,000 psi) (optional) AZ50, AZ55 Galvalume®, G100 Galvanized (optional) Embossing Available
Fastening System:	Concealed Fastening Expansion & Contraction Clip System	Fielding Conditions:	Oil Canning is inherent in all light gauge metal products & is not a cause for rejection. Visit www.briggssteel.com/oilcanning for more information.
Length(s):	Maximum Length of 100' + Minimum Length of 3'0"	Accessories:	Trim, Custom Trim, Fasteners, Sealant, Closures, Venting, Pipe Flashings, Underlayment, Snow Retention, Polycarbonate Panels, Many Tools.
Minimum Slope:	1½:12 Pitch or greater using recommended self-adhered underlayment covering entire substrate 3:12 Pitch or greater	More Details:	For more information about this profile, please visit www.BriggsSteel.com
Substrate Install:	Solid		
Ribbing Options:	Smooth, Striations, Box Ribs, Pencil Ribs		

Materials Available

26ga, 24ga, 22ga

0.032" Aluminum

16oz, 20oz Natural Copper

WeatherXL™ SMP by Sherwin-Williams®
Fluropon® by Sherwin-Williams® PVDF (Kynar 500®)

Textured / Crinkle (Rawhide)
Vintage®
Western Rust
Cor-Ten AZP® Raw
Copper-Ten® Raw
Galv-Ten® Raw
Galvalume® (Acrylic Coating)
Galvanized
Electro-Galvanized
Galvannealed
Bonderized Weathering Steel
ReziBond® Weathering Steel
Cold Rolled Weathering Steel
A606-4 (Corten) Weathering Steel
Hammered Copper
Stainless Steel
Perforated
(See Color Guide(s) for Many More Options)



Protective Film Available Upon Request

Note: For standard color selection, consult the current Briggs Steel Color Selection Guides. Custom colors are available upon request.

**Actual coverage may vary slightly due to the characteristics of the steel.

Testing


Meets Requirements for:
UL 580 Class 90 & ASTM E1592 Uplift Resistance
UL 2218 Class 4 Impact Resistance
UL 263 & UL 790 Class A Fire Resistance
ASTM E283 & ASTM E1680 Air Infiltration
ASTM E331 & ASTM E1646 Water Penetration

Typical Fastener Spacing

- 24" on center max for 7¾" to 11¾" panel widths
- 24" on center max for 12" to 15¾" panel widths
- 18" on center max for 16" to 19¾" panel widths

*The above diagrams are the typical fastener pattern. However pattern & spacing may not be appropriate for all applications. Consult local building codes and/or professional engineer for alternative use.

Install This Direction →

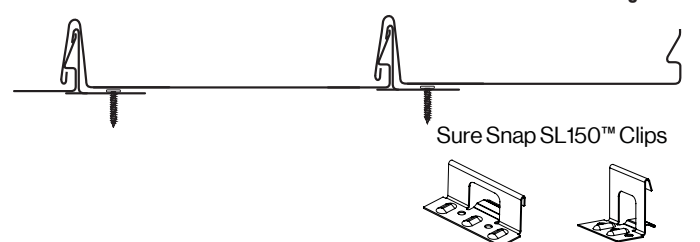

For more testing information please visit www.briggssteel.com/resources/testing

www.BriggsSteel.com

Phone: (208) 745-1500

Toll-Free: (877) 95-STEEL

Copyright © 2023 by Briggs Steel, Inc. All rights reserved. Rev 04/23.

Due to product advancements, changes and other factors, we reserve the right modify or delete the information herein without prior notice.