


PBR PlusX™ Panel • 3/8" Corrugated Maxx™ • 3/4 Corrugated Maxx™

Tuff Rib PlusX™ • Inverted R-Panel WP™

Standard Colors



WINTER WHITE



LIGHT STONE



BEIGE



TAN



HICKORY



ASH GRAY



LIGHT GRAY




DARK GRAY



BURNISHED SLATE



MEDIUM BROWN



DARK BROWN



DARK RED



CRIMSON RED




DARK GREEN




FOREST GREEN



DEEP BLACK




ONYX BLACK



COPPER METALLIC*

Non-Painted Colors



GALVALUME® PLUS



MODERN GALVANIZED



CLASSIC GALVANIZED



*Steel Substrate Grade E (yield strength of 80,000 psi) & Grade D (yield strength of 50,000 psi)
 *Substrate Coatings - Galvalume® AZ50, AZ55, AZ60, AZ70 & Galvanized G40, G60, G90, G100.
 *Due to product advancements, changes and other factors, we reserve the right to modify or delete the information herein without prior notice.

*WeatherXL™ is a trademark of The Sherwin-Williams Company.
 *Galvalume® is a registered trademark of BIEC International, Inc.
 *Sherwin-Williams® is a registered trademark of The Sherwin-Williams Company.
 *Protective film must be removed immediately after installation.

*Metallics are a premium cost & are batch sensitive, therefore variations are very common & expected to vary.
 *Not all products listed offer 40 year paint warranty and warranties vary.
 *Oil Canning is not a cause for rejection. See oil canning disclaimer.

Printed colors may vary from actual product. Metal samples available upon request. Please inquire for metal type, gauge, color, availability & lead times.

Briggs Steel | sales@BriggsSteel.com | (877) 95 · STEEL

Exposed Fastening Metal Roofing & Siding


Standard Profiles

Tuff Rib PlusX™


BEST SELLER



3/8" Corrugated Maxx™ Panel

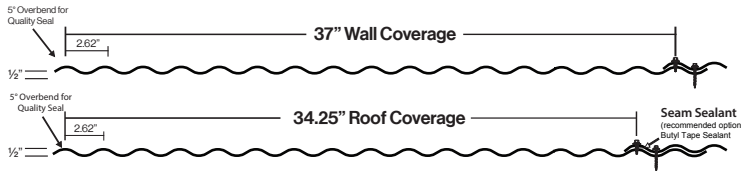

3/4" Corrugated Maxx™ Panel

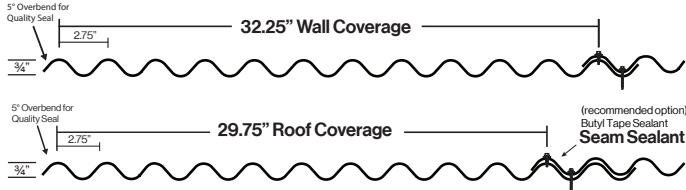

R Panel SLW™ (Short Leg Wall)







Inverted R Panel SLW™ (Short Leg Wall)



Install This Direction →

← Prevailing Wind

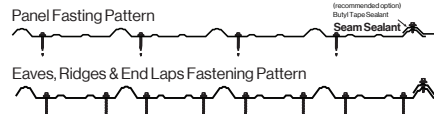




Correct Fastening Depth



*Impact drivers not recommended for fastening.
Typical Fastener Spacing
 - 24" on center max spacing
 (see panel load table)


*The above diagrams are the typical fastener pattern based on the live load table. However pattern & spacing may not be appropriate for all applications. Consult local building codes and/or professional engineer for alternative use.

Large Selection of Profiles

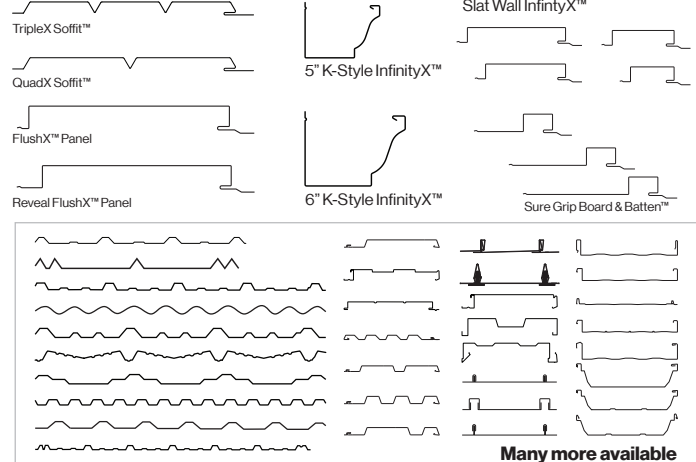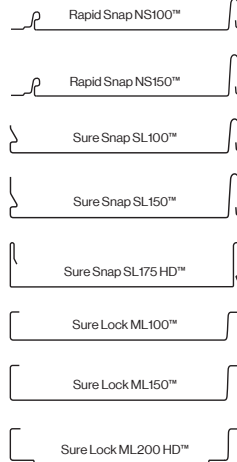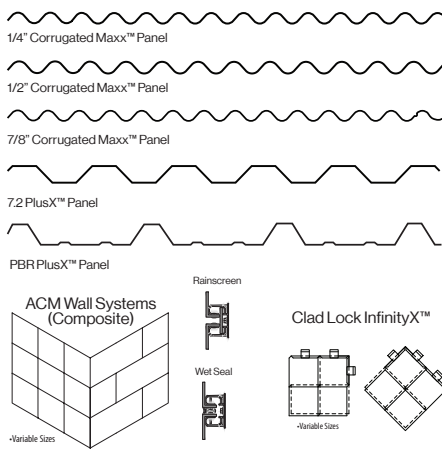

WE OFFER MANY COLORS & PROFILES NOT INCLUDED ON THIS CHART

- Many other panel profiles are available. Please talk to representative for details.
- Standard & Custom trim available for all profiles and for profiles not listed.
- Custom trim options available for a variety of different applications.
- Large Inventory of Coil, Flat Sheet, Fasteners, Sealants & Accessories.

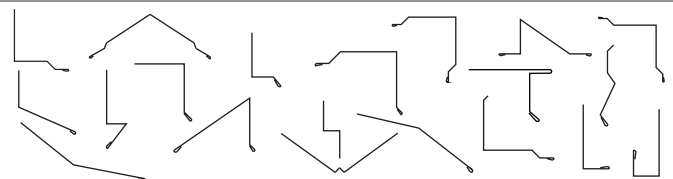

Standard & Custom Bending/Folding

- **Actual coverage may vary slightly due to the characteristics of the steel.
- Please inquire for metal type, gauge, color, availability and lead times.
- Protective film must be removed immediately after installation.
- Please see product specification sheet for more details.
- Oil Canning is not a cause for rejection.
- Profiles are not to scale.

Toll-Free: (877) 95-STEEL

Office: (208) 745-1500

Email: sales@briggssteel.com

Fax: (208) 745-0675

www.BriggsSteel.com

4056 E 300 N

Rigby, Idaho 83442

