


ProtectorX Series / 3/8" Corrugated

Product Highlights

The 3/8" Corrugated Panel is an exposed fastener Metal Roofing – Steel Roofing and/or Metal Siding – Steel Siding panel. This panel offers the versatility of being used in both vertical and horizontal applications. This Corrugated Roofing – Corrugated Siding panel gives the look of an old time and/or modern application.

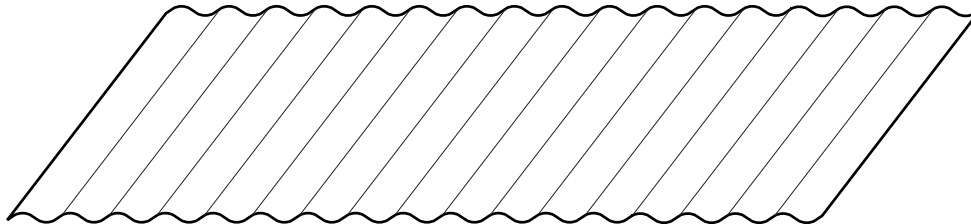

Materials Available

26ga, High Quality Grade E Steel
(yield strength of 80,000 psi)

WeatherXL™ SMP by Sherwin-Williams®
Fluropon® by Sherwin-Williams® PVDF (Kynar 500® or Hylar 5000®)
Fluropon® by Sherwin-Williams® PVDF 3 Coat (Kynar 500® or Hylar 5000®)
Super Dynapox by Sherwin-Williams® (ceramic pigment polyester coating)
AZ55 Galvalume® with Acrylic Coating

Galvalume®
Galvanized
Textured / Crinkle (Rawhide)
(See Standard Color Guide for Color Options)



Product Specifications

Applications:	Roofing, Wall, Soffit, Fascia, Ceiling, Interior	Coatings:	WeatherXL™ SMP by Sherwin-Williams® (Silicone Modified Polyester) Fluropon® by Sherwin-Williams® PVDF (Kynar 500® or Hylar 5000®) Fluropon® by Sherwin-Williams® PVDF 3 Coat (Kynar 500® or Hylar 5000®) Super Dynapox by Sherwin-Williams® (ceramic pigment polyester coating) AZ55 Galvalume® with Acrylic Coating
Coverage:	36" Coverage	Substrate:	AZ50 Galvalume® Grade E (yield strength of 80,000 psi) (optional) AZ55 Galvalume® G60, G90, G100 Galvanized (optional) Grade D (yield strength of 50,000 psi) (optional) Embossing Available
Rib Heights:	1 1/2" on 7.2" Centers	Fielding Conditions:	Oil Canning is inherent in all light gauge metal products & is not a cause for rejection. Visit www.briggssteel.com/oilcanning for more information.
Fastening System:	Exposed Fastening	Accessories:	Trim, Custom Trim, Fasteners, Sealant, Closures, Venting, Pipe Flashings, Underlayment, Snow Retention, Polycarbonate Panels, Many Tools.
Length(s):	Maximum Length of 50' 0" Minimum Length of 3' 0"	More Details:	For more information about this profile, please visit www.BriggsSteel.com
Minimum Slope:	1/2:12 Pitch or greater with butyl tape sealant & recommended self-adhered underlayment covering entire substrate 3:12 Pitch or greater (optional: recommended butyl tape sealant)		
Substrate Install:	Solid or Open Purlin System		
Thickness:	26ga High Quality Grade D (yield strength of 50,000 psi) (optional) 24ga, 22ga (Please inquire for more available thicknesses)		

Protective Film Available Upon Request

Note: For standard color selection, consult the current Briggs Steel Color Selection Guides. Custom colors are available upon request.
**Actual coverage may vary slightly due to the characteristics of the steel.

For more load table information, please contact Briggs Steel sales representative.

Live Load (PSF)	24"	30"	36"	42"	48"	60"
2 or More Spans	120	76	53	39	29	15
3 or More Spans	149	93	53	34	22	11

*Based on 29ga Grade E Steel (yield strength of 80,000 psi)

Testing

Meets Requirements for:
UL 580 Class 90 Uplift Resistance
UL 2218 Class 4 Impact Resistance
UL 263 & UL 790 Class A Fire Resistance

For more testing information please visit www.briggssteel.com/resources/testing

Typical Fastener Spacing

- 24" on center (typical solid substrate)
- Up to 60" on Center (see load table)

*The above diagrams are the typical fastener pattern based on the live load table. However pattern & spacing may not be appropriate for all applications. Consult local building codes and/or professional engineer for alternative use.

Install This Direction →

← Prevailing Wind

Panel Fasting Pattern



Eaves, Ridges & End Laps Fastening Pattern



Correct Fastening Depth



Seam Sealant

(Recommended option)
Butyl Tape Sealant

Wall Lap

Roofing Lap

