

WeatherXL™ SMP (Silicone Modified Polyester)

Standard Colors



Available With...



Ultra Low Gloss Colors



Premium Colors




Textured Finishes

WeatherXL™ Crinkle Finishes by Sherwin-Williams®



Economy Colors

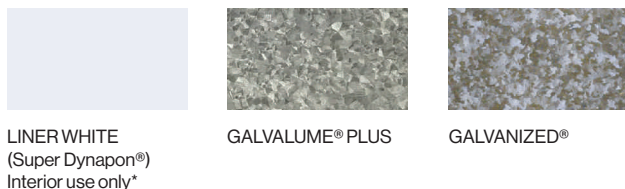

For an expanded selection of colors,
please see our additional Color Guides.



*Steel Substrate Grade E (yield strength of 50,000 psi) & Grade D (yield strength of 50,000 psi)
 •Substrate Coatings - Galvalume® AZ50, AZ55, AZ70 & Galvanized G40, G60, G90, G100.
 •WeatherXL™ is a trademark of The Sherwin-Williams Company.
 •Super Dynapon® is a registered trademark of The Sherwin-Williams Company.
 •Galvalume® is a registered trademark of BIEC International, Inc.

•Sherwin-Williams® is a registered trademark of The Sherwin-Williams Company.
 •DripStopper™ is a trademark of Briggs Steel, Inc.
 •Liner White is coated with Super Dynapon® Polyester and is for indoor use only.
 •Texture Finishes, Specialty Colors, Natural Metals & Non-Painted are batch sensitive and therefore variations are very common and expected to vary.
 •Metallics are a premium cost & batch sensitive, therefore variations are very common & expected to vary.



•Not all products listed offer 40 year paint warranty and warranties vary.
 •Oil Canning is not a cause for rejection. See oil canning disclaimer.
 •Protective film must be removed immediately after installation.
 •Due to product advancements, changes and other factors, we reserve the right to modify or delete the information herein without prior notice.

Exposed Fastening Metal Roofing & Siding


Standard Profiles ProtectorX Series™

Tuff Rib PlusX™




Install This Direction →


← Prevailing Wind




3/8" Corrugated Maxx™ Wall Panel




3/4" Corrugated Maxx™ Roof Panel



R Panel SLW™ (Short Leg Wall)



Inverted R Panel SLW™ (Short Leg Wall)



Correct Fastening Depth








Typical Fastener Spacing

-24" on center max spacing
(see panel load table)


*The above diagrams are the typical fastener pattern based on the live load table. However pattern & spacing may not be appropriate for all applications. Consult local building codes and/or professional engineer for alternative use.

Large Selection of Profiles

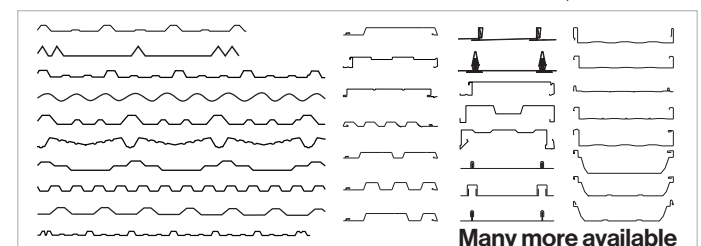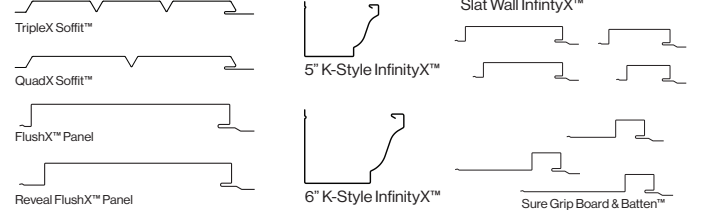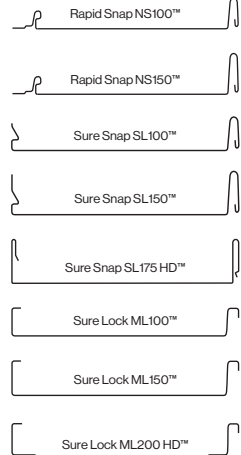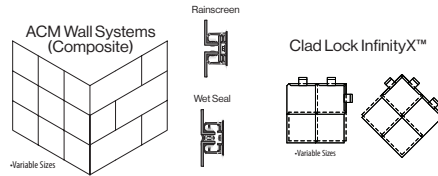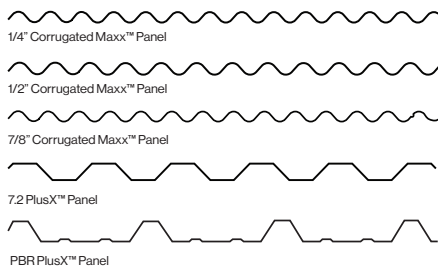

WE OFFER MANY COLORS & PROFILES NOT INCLUDED ON THIS CHART

- Many other panel profiles are available. Please talk to representative for details.
- Standard & Custom trim available for all profiles and for profiles not listed.
- Custom trim options available for a variety of different applications.
- Large Inventory of Coil, Flat Sheet, Fasteners, Sealants & Accessories.

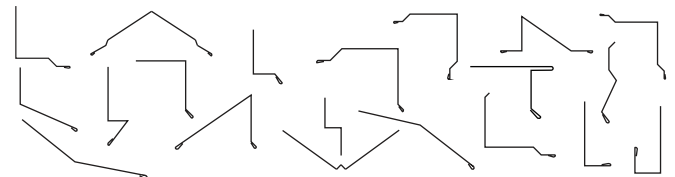

Standard & Custom Bending/Folding

**Actual coverage may vary slightly due to the characteristics of the steel.
•Please inquire for metal type, gauge, color, availability and lead times.
•Please see product specification sheet for more details.
•Profiles are not to scale.

Toll-Free: (877) 95-STEEL

Office: (208) 745-1500

Email: sales@briggssteel.com

www.BriggsSteel.com

4056 E 300 N

Rigby, Idaho 83442



Copyright © 2026 by Briggs Steel, Inc. All rights reserved. Rev 08/26.

Due to product advancements, changes and other factors, we reserve the right to modify or delete the information herein without prior notice.

Printed colors may vary from actual product. Metal samples available upon request. Please inquire for metal type, gauge, color, availability & lead times.

